


MAX. PRESSURE— 65"H₂O (60Hz), 50"H₂O (50Hz)
 MAX. AIR FLOW— 160 CFM (60Hz), 133 CFM (50Hz)

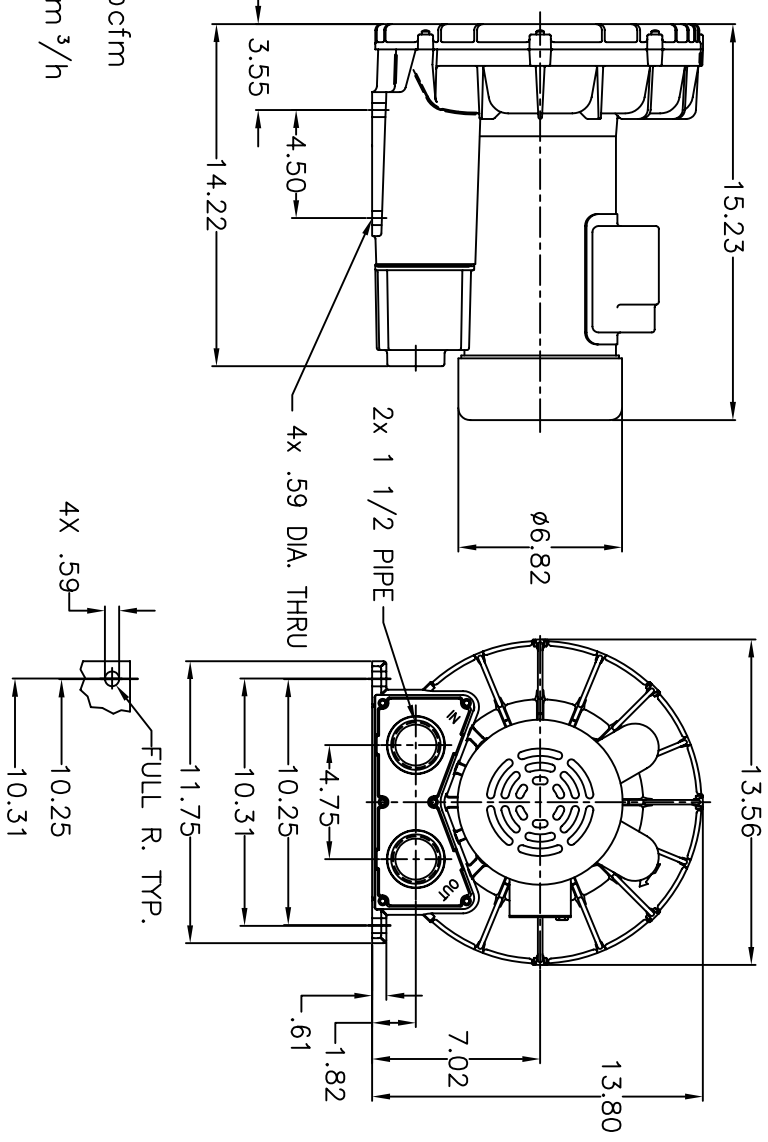

MOTOR ENCLOSURE: TEFC

| | | |
|----------------|------|-------------------|
| HP/kw: | 60Hz | 2.5/1.9 |
| | 50Hz | 1.85/1.38 |
| VOLTAGE: | 60Hz | 208-230/460-3 |
| | 50Hz | 190-220/380-415-3 |
| AMPS: | 60Hz | 6.9-6.9/3.45 |
| | 50Hz | 6.6-6.7/3.3-3.5 |
| STARTING AMPS: | 60Hz | 58 @ 230V |
| | 50Hz | 23 @ 380V |

INSULATION CLASS: B
 RECOMMENDED NEMA STARTER SIZE: 0/00
 NET WEIGHT(lbs/kg): 65/29,5

| REV. | DATE | REVISION | BY |
|------|------|-----------------|----|
| | | FINISH REQUIRED | |

TOLERANCES UNLESS OTHERWISE NOTED
 ±.005 .000
 ±.015 .00
 FRACTIONAL
 ±1/64
 ANGULAR
 ±1°

QAC CONVERTER ACCESSORY CORP. WIND GAP, PA

TITLE: MODEL #501G REGENERATIVE BLOWER
 DRAWN BY: MJT SCALE: 1/8"=1"
 DATE: 1-21-05
 DWG. NO.: 20222-56 DISK FILE: MEPROJ
 CUSTOMER: CUSTOMER SO#: DATE:

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.