


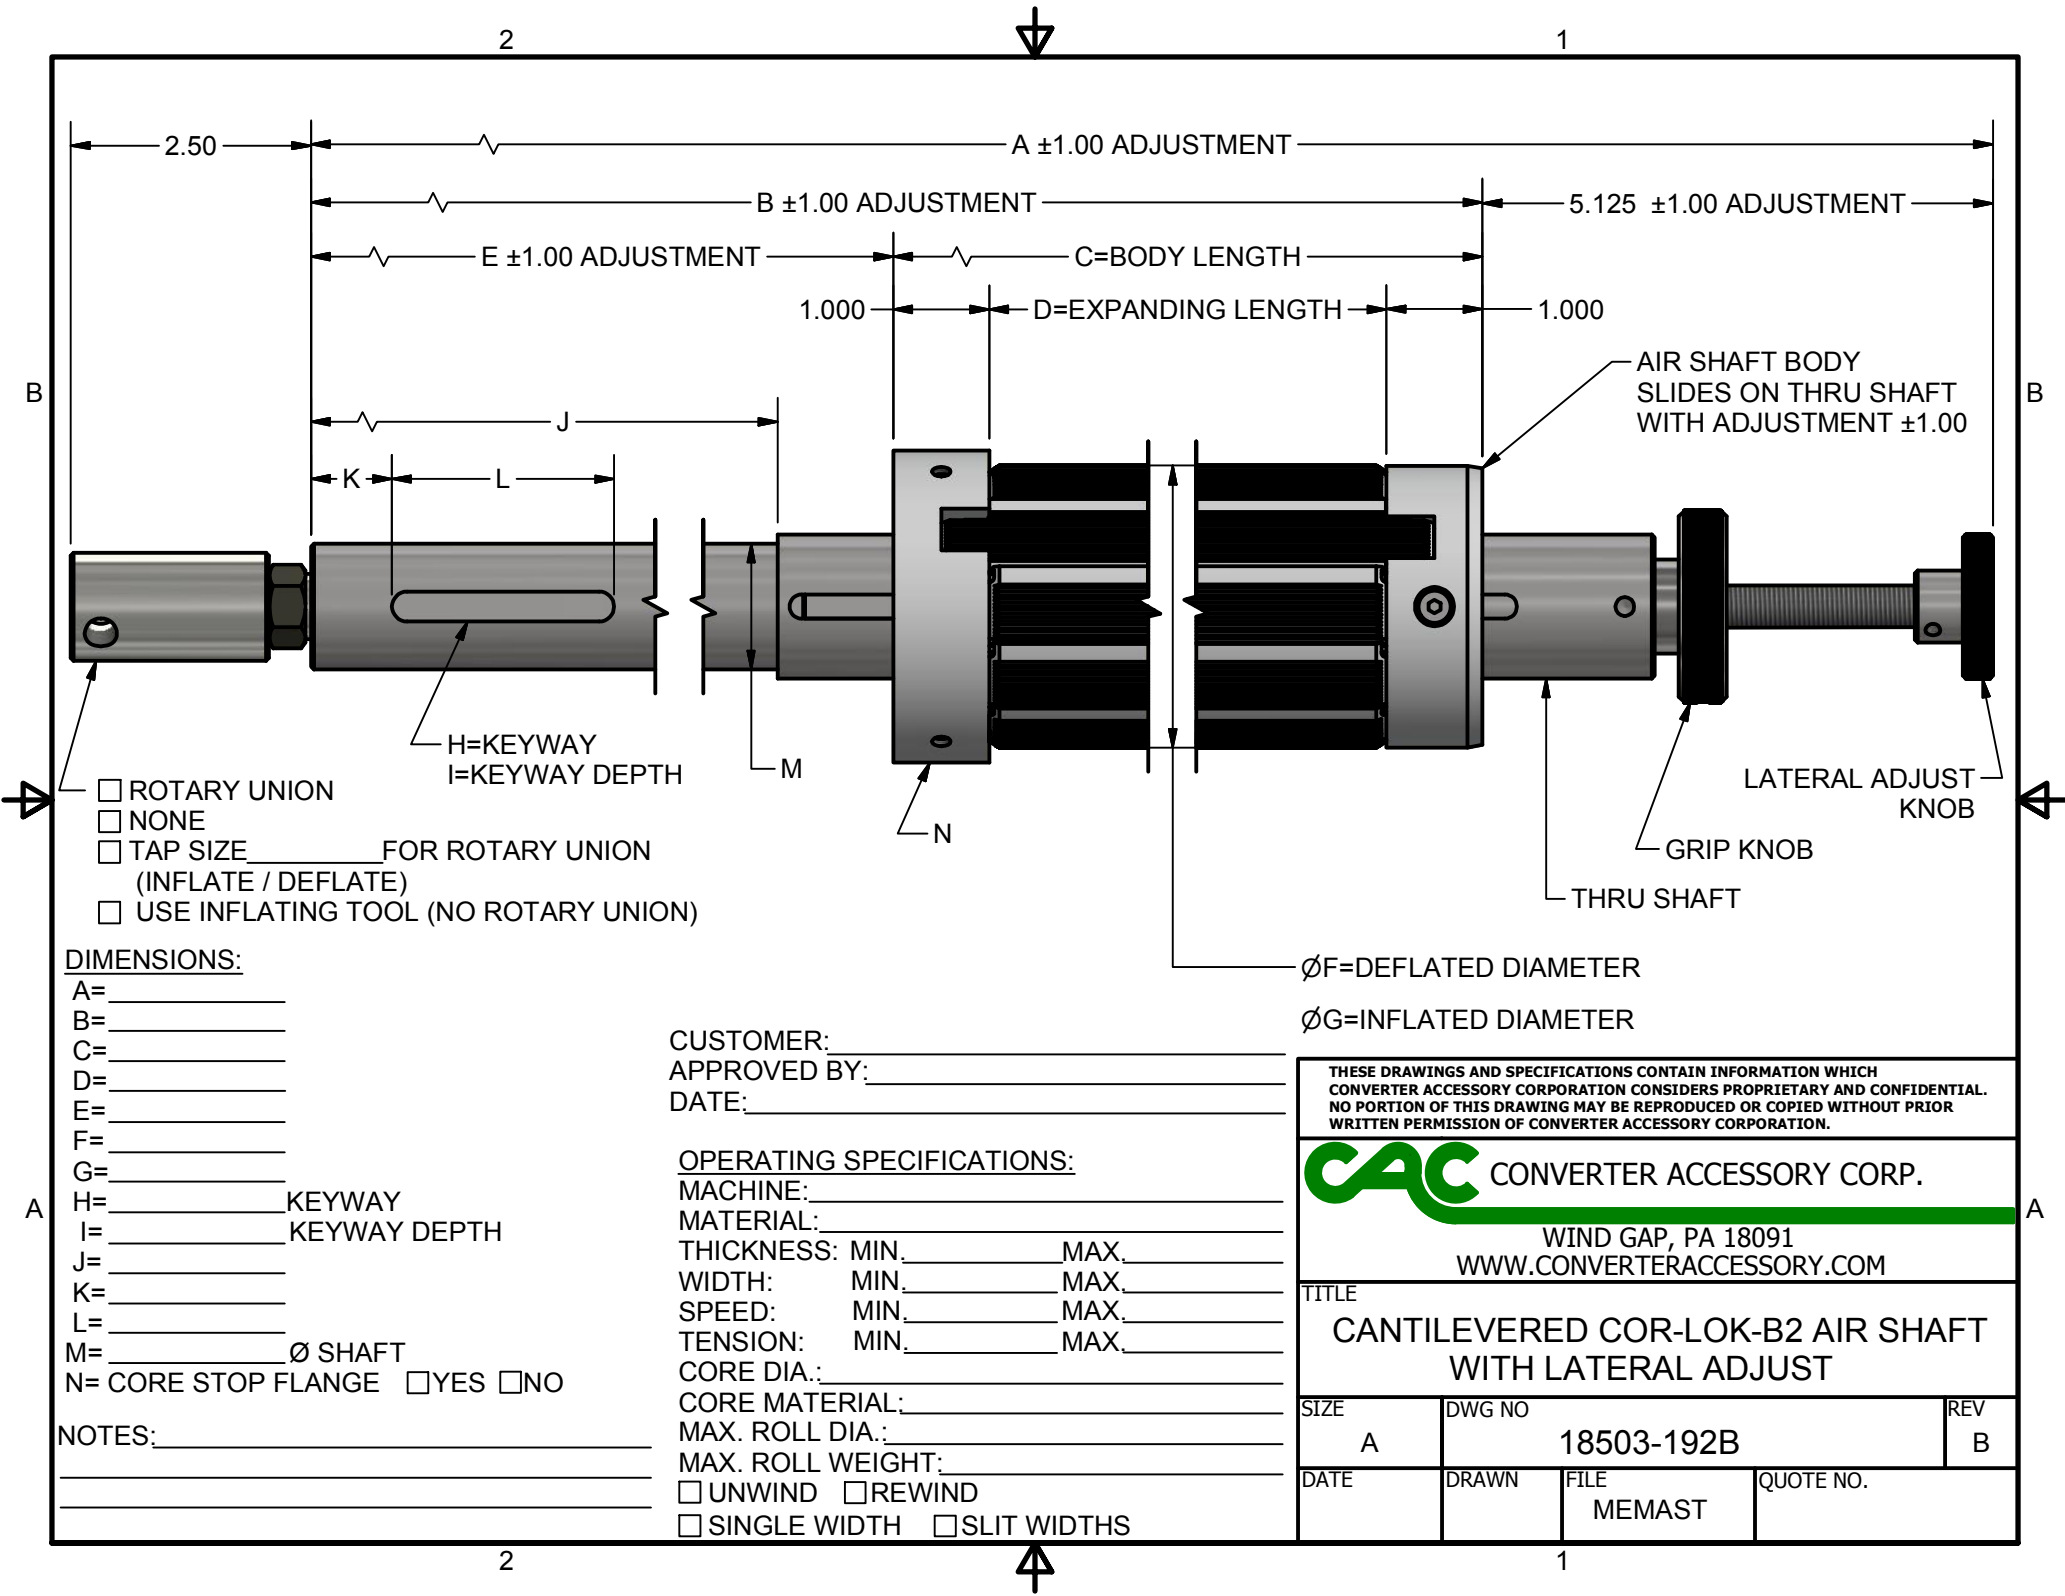

- ☐ ROTARY UNION
☐ NONE
☐ TAP SIZE _____ FOR ROTARY UNION
(INFLATE / DEFLATE)
☐ USE INFLATING TOOL (NO ROTARY UNION)

DIMENSIONS:

A= _____
B= _____
C= _____
D= _____
E= _____
F= _____
G= _____
H= _____ KEYWAY
I= _____ KEYWAY DEPTH
J= _____
K= _____
L= _____
M= _____ Ø SHAFT
N= CORE STOP FLANGE ☐ YES ☐ NO

NOTES: _____

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE DIA.: _____
CORE MATERIAL: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____
☐ UNWIND ☐ REWIND
☐ SINGLE WIDTH ☐ SLIT WIDTHS

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CAC CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE
**CANTILEVERED COR-LOK-B2 AIR SHAFT
WITH LATERAL ADJUST**

SIZE A	DWG NO 18503-192B	REV B
DATE	DRAWN MEMAST	QUOTE NO.