

DESIGN PARAMETERS

L-ROLL PIVOT ARM

SERIES#	2424	2436	2460
CORE SIZE	3" I.D.	3" I.D.	3" I.D.
ROLL DIA.	24" MAX.	24" MAX.	24" MAX.
ROLL	14" MIN.	20" MIN.	32" MIN.
WIDTH	24" MAX.	36" MAX.	60" MAX.
A	12.750	12.750	12.750
B	12.750	18.750	30.750
C	13.750	19.750	31.750

3" PROBE


SERIES#	300650	300950	301350
ROLL WEIGHT	300 LBS. MAX.	600 LBS. MAX.	1000 LBS. MAX.
D	17.375	20.375	24.375
E	6.500	9.500	13.500
F	3.000	6.000	10.000

MODEL# = _____
(L-ROLL SERIES) (PROBE SERIES)

HANDLE CLEVIS
GRIPPER DISENGAGEMENT LOCK


LIFT/RELEASE HANDLE

L-ROLL PIVOT ARM

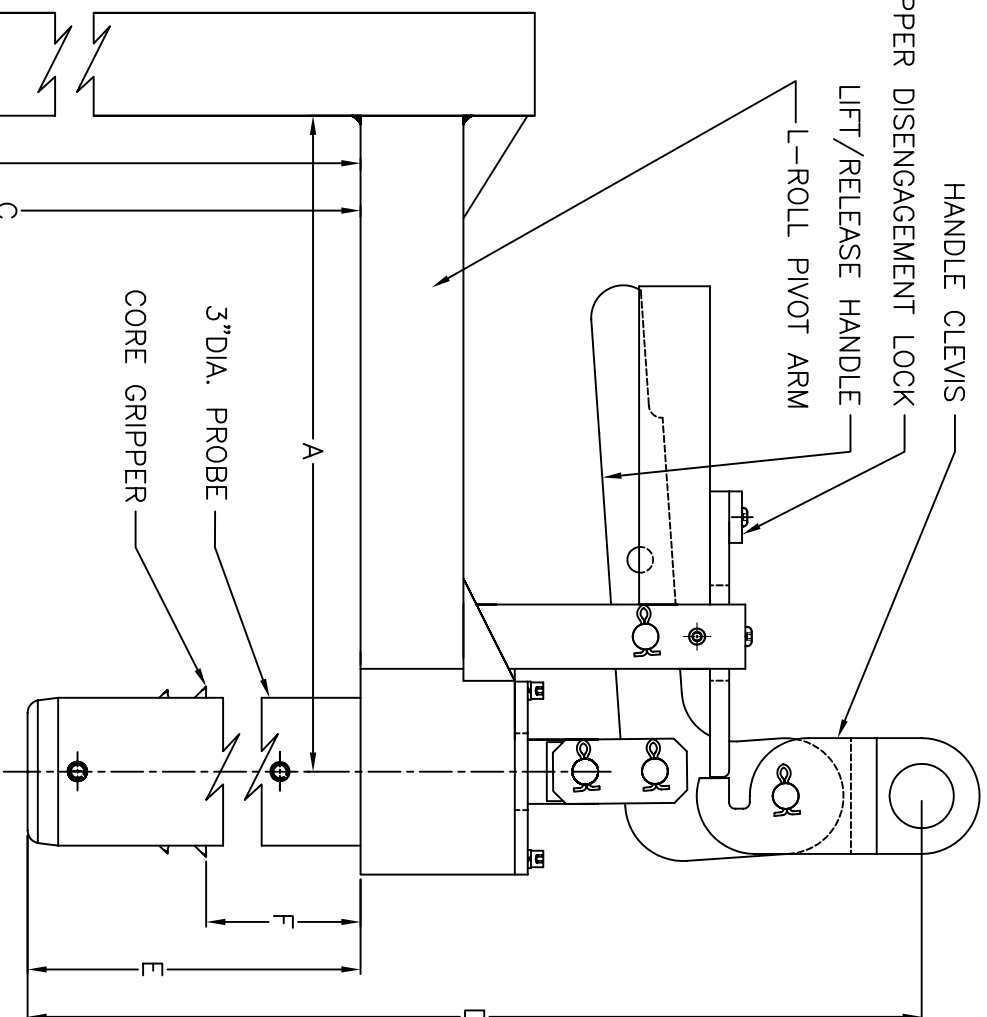

OPERATING SPECS:

ROLL WIDTH: MIN. _____ MAX. _____
CORE DIA.: I.D. _____ O.D. _____
ROLL DIA. MIN. _____ MAX. _____
ROLL WEIGHT: MIN. _____ MAX. _____
CORE MATERIAL: _____
WILL ROLL OF MATERIAL TELESCOPE? ☐ YES ☐ NO

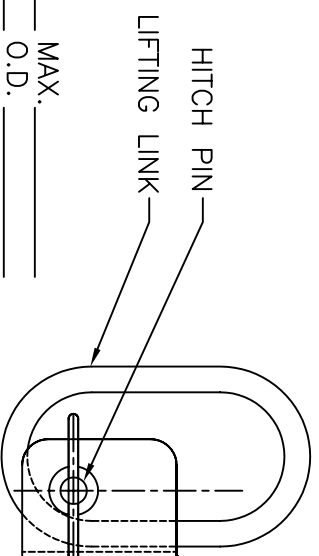

HITCH PIN

LIFTING LINK

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

WAC CONVERTER ACCESSORY CORP. ☐
WIND GAP, PA

SPECIFICATION SHEET

TITLE: COMPACT L-ROLL PIVOT ARM
DRAWN BY: MJT SCALE: 1/4" = 1" QUOTE No. _____
DWG. NO.: 18503-195 DISK FILE: MEMAST