

DESIGN PARAMETERS

L-ROLL PIVOT ARM

SERIES#	2424	2436	2460
CORE SIZE	6" I.D.	6" I.D.	6" I.D.
ROLL DIA.	24" MAX.	24" MAX.	24" MAX.
ROLL WIDTH	14" MIN.	20" MIN.	32" MIN.
	24" MAX.	36" MAX.	60" MAX.
A	12.750	12.750	12.750
B	12.750	18.750	30.750
C	13.750	19.750	31.750


6" PROBE

SERIES#	600650	600950	601350
ROLL WEIGHT	300 LBS. MAX.	600 LBS. MAX.	1000 LBS. MAX.
D	17.375	20.375	24.375
E	6.500	9.500	13.500
F	3.000	6.000	10.000

MODEL# = _____
 (L-ROLL SERIES) (PROBE SERIES)

OPERATING SPECS:

ROLL WIDTH: MIN. _____ MAX. _____
 CORE DIA.: I.D. _____ O.D. _____
 ROLL DIA. MIN. _____ MAX. _____
 ROLL WEIGHT: MIN. _____ MAX. _____
 CORE MATERIAL: _____
 WILL ROLL OF MATERIAL TELESCOPE? ☐ YES ☐ NO

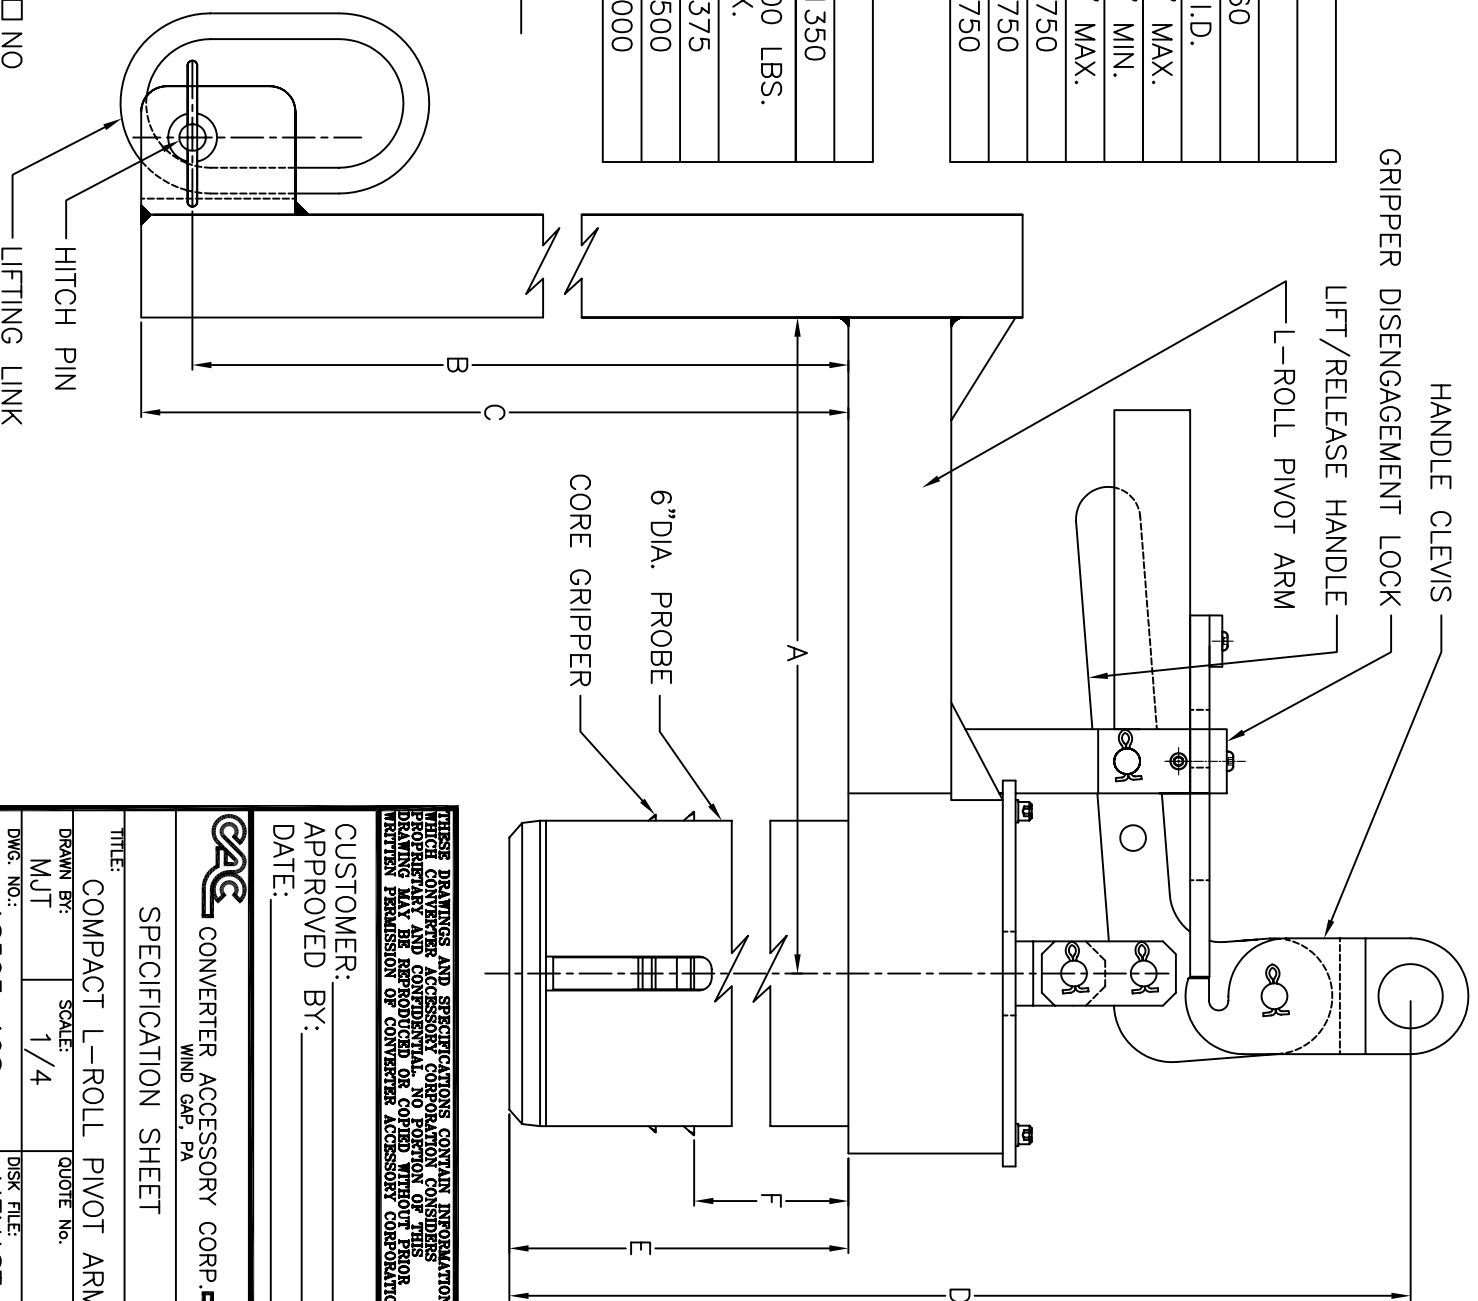

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____
 APPROVED BY: _____
 DATE: _____



CONVERTER ACCESSORY CORP. ☐
 WIND GAP, PA

SPECIFICATION SHEET

TITLE:

COMPACT L-ROLL PIVOT ARM

DRAWN BY:

MJT

SCALE:

1/4

QUOTE No.

DWG. NO.:

18503-198

DISK FILE:

MEMAST