

ROLL SPECIFICATIONS:

COATING / PLATING:

ROLL FINISH:

ALLOWABLE TOTAL INDICATED RUNOUT:

MAXIMUM TEMPERATURE:

TIME ALLOWED TO ATTAIN MAXIMUM TEMPERATURE:

TEMPERATURE TOLERANCE:


CONTROL:  AUTOMATIC  NONE

ELECTRICAL SUPPLY REQUIREMENTS: 220 VOLTS / 3 PHASE / 60 HZ

NOTES:

B

B

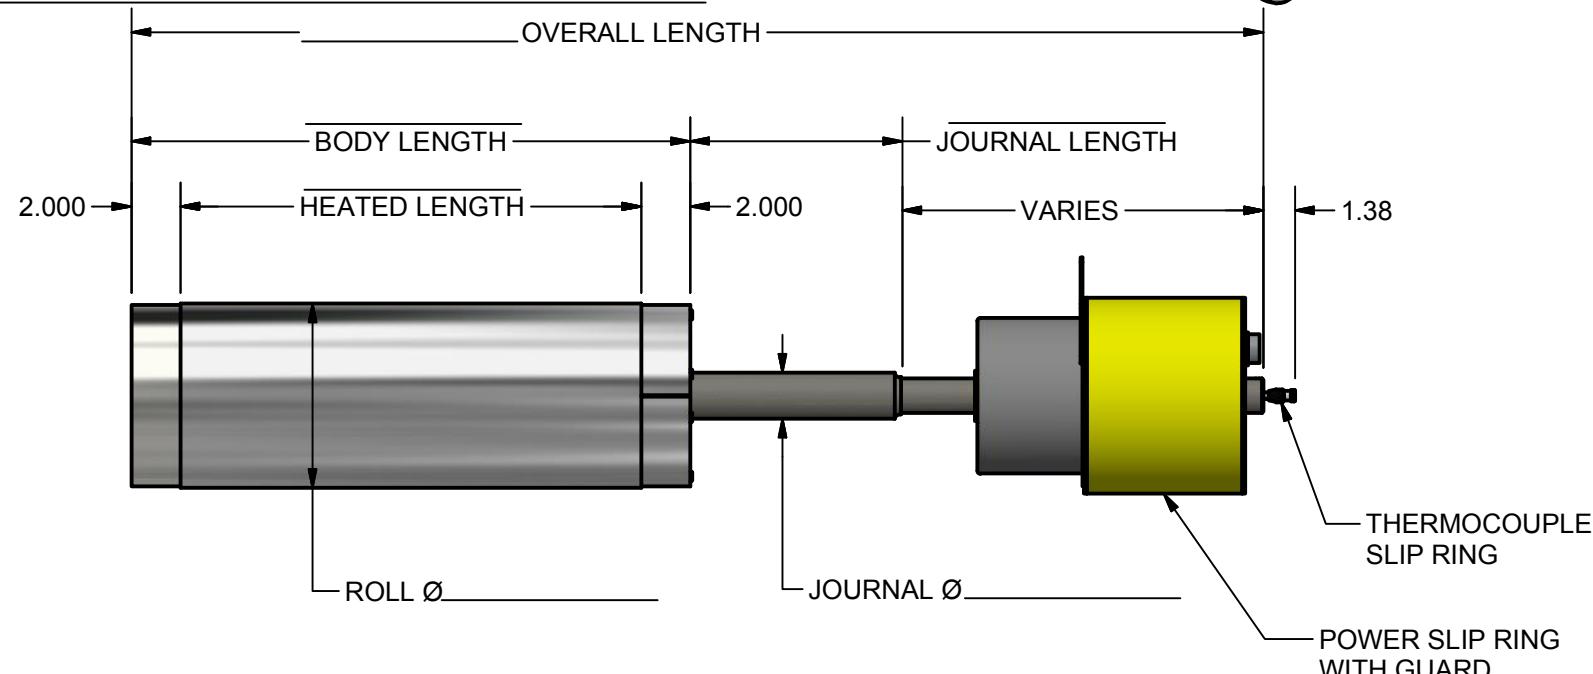

CUSTOMER:

APPROVED BY:

DATE:

OPERATING SPECIFICATIONS:

MACHINE:

MATERIAL:

THICKNESS: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

WIDTH: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

SPEED: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

TENSION: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

WEB WRAP ANGLE: \_\_\_\_\_

MATERIAL SPECIFIC HEAT (BTU/[LB.][°F]): \_\_\_\_\_

MATERIAL DENSITY (LB/IN³): \_\_\_\_\_

TEMPERATURE RISE: \_\_\_\_\_

REQUIRED WATTS: \_\_\_\_\_

A

A



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091

WWW.CONVERTERACCESSORY.COM

TITLE

CANTILEVERED  
ELECTRICALLY HEATED ROLL ASSEMBLY

SIZE

A

DWG NO

18503-19D

REV

D

DATE

DRAWN

FILE

MEMAST

QUOTE NO.

THESE DRAWINGS AND SPECIFICATIONS  
CONTAIN INFORMATION WHICH  
CONVERTER ACCESSORY CORPORATION  
CONSIDERS PROPRIETARY AND  
CONFIDENTIAL.  
NO PORTION OF THIS DRAWING MAY  
BE REPRODUCED OR COPIED WITHOUT  
PRIOR WRITTEN PERMISSION OF  
CONVERTER ACCESSORY CORPORATION.