

HANDLE CLEVIS — GRIPPER DISENGAGEMENT LOCK —


LIFT/RELEASE HANDLE —

L-ROLL PIVOT ARM —

DESIGN PARAMETERS			
L-ROLL PIVOT ARM			
SERIES#	4824	4836	4860
CORE SIZE	6" I.D.	6" I.D.	6" I.D.
ROLL DIA.	48" MAX.	48" MAX.	48" MAX.
ROLL WIDTH	14" MIN.	20" MIN.	32" MIN.
	24" MAX.	36" MAX.	60" MAX.
A	24.750	24.750	24.750
B	12.750	18.750	30.750
C	13.750	19.750	31.750

6" PROBE			
SERIES#	600650	600950	601350
ROLL WEIGHT	300 LBS. MAX.	600 LBS. MAX.	1000 LBS. MAX.
D	17.375	20.375	24.375
E	6.500	9.500	13.500
F	3.000	6.000	10.000

MODEL# = _____ (L-ROLL SERIES) (PROBE SERIES)

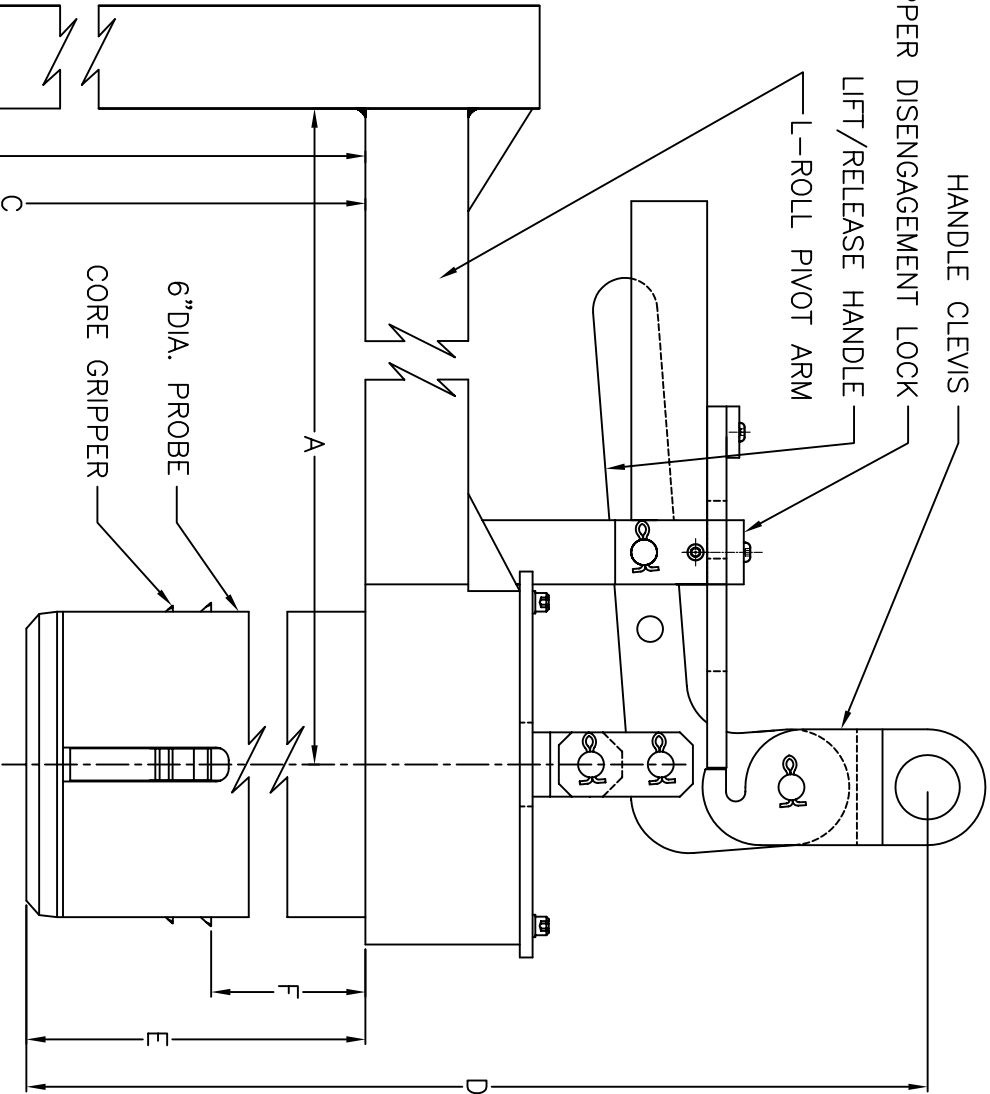

OPERATING SPECS:

ROLL WIDTH: MIN. _____ MAX. _____
CORE DIA.: I.D. _____ O.D. _____
ROLL DIA. MIN. _____ MAX. _____
ROLL WEIGHT: MIN. _____ MAX. _____
CORE MATERIAL: _____
WILL ROLL OF MATERIAL TELESCOPE? ☐ YES ☐ NO



CONVERTER ACCESSORY CORP. WIND GAP, PA

SPECIFICATION SHEET

TITLE: LARGE L-ROLL PIVOT ARM
DRAWN BY: MJT SCALE: 1/4
DWG. NO.: 18503-200 DISK FILE: MEMAST

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____
APPROVED BY: _____
DATE: _____