

DESIGN PARAMETERS

ADJUSTABLE L-ROLL PIVOT ARM

SERIES#	AW2424	AW2436	AW2460
CORE SIZE	3" I.D.	3" I.D.	3" I.D.
ROLL DIA.	24" MAX.	24" MAX.	24" MAX.
ROLL WIDTH	7.5" MIN.	13.5" MIN.	25.5" MIN.
A	12.750	12.750	12.750
B	6.250 MIN.	12.250 MIN.	24.250 MIN.
	12.750 MAX.	18.750 MAX.	30.750 MAX.
C	7.250 MIN.	13.250 MIN.	25.250 MIN.
	13.750 MAX.	19.750 MAX.	31.750 MAX.

3" PROBE

SERIES#	300650	300950	301350
ROLL WEIGHT	300 LBS. MAX.	600 LBS. MAX.	1000 LBS. MAX.
D	17.375	20.375	24.375
E	6.500	9.500	13.500
F	3.000	6.000	10.000



MODEL# = $\frac{A}{L}$ $\frac{W}{P}$

(L-ROLL SERIES)

(PROBE SERIES)

OPERATING SPECS.:

ROLL WIDTH: MIN. _____ MAX. _____
CORE DIA.: I.D. _____ O.D. _____
ROLL DIA. MIN. _____ MAX. _____
ROLL WEIGHT: MIN. _____ MAX. _____
CORE MATERIAL: _____
WILL ROLL OF MATERIAL TELESCOPE? ☐ YES ☐ NO

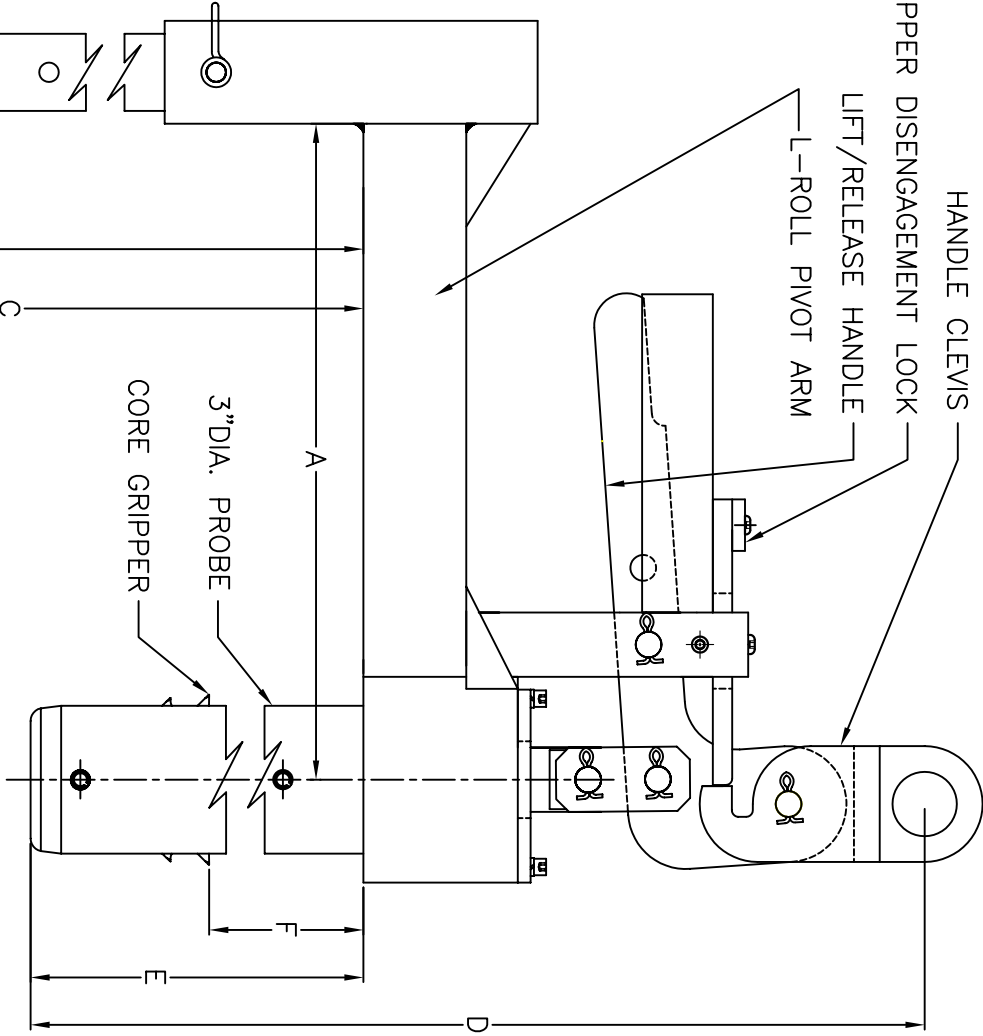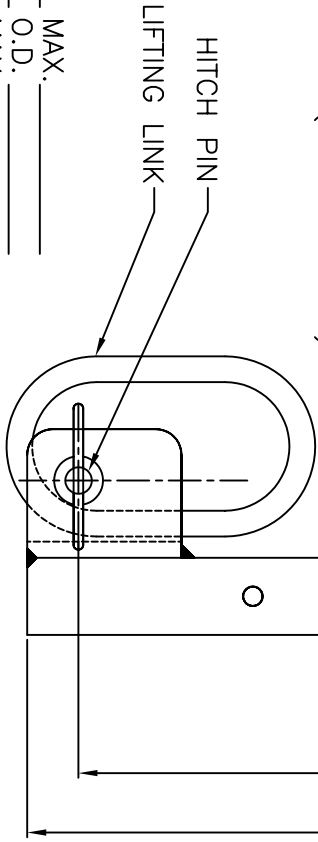

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____

APPROVED BY: _____

DATE: _____



CONVERTER ACCESSORY CORP. ☐
WIND GAP, PA

SPECIFICATION SHEET

TITLE: COMPACT ADJUSTABLE
L-ROLL PIVOT ARM

DRAWN BY: MJT SCALE: 1/4" = 1" QUOTE No. _____

DWG. NO.: 18503-203 DISK FILE: MEMAST