


DESIGN PARAMETERS			
ADJUSTABLE L-ROLL PIVOT ARM			
SERIES#	AW2424	AW2436	AW2460
CORE SIZE	6" I.D.	6" I.D.	6" I.D.
ROLL DIA.	24" MAX.	24" MAX.	24" MAX.
ROLL WIDTH	7.5 MIN.	13.5" MIN.	25.5" MIN.
	24" MAX.	36" MAX.	60" MAX.
A	12.750	12.750	12.750
B	6.250 MIN.	12.250 MIN.	24.250 MIN.
	12.750 MAX.	18.750 MAX.	30.750 MAX.
C	7.250 MIN.	13.250 MIN.	25.250 MIN.
	13.750 MAX.	19.750 MAX.	31.750 MAX.

6" PROBE			
SERIES#	600650	600950	601350
ROLL WEIGHT	300 LBS. MAX.	600 LBS. MAX.	1000 LBS. MAX.
D	17.375	20.375	24.375
E	6.500	9.500	13.500
F	3.000	6.000	10.000

MODEL# = $\frac{A}{L}$ $\frac{W}{P}$ (L-ROLL SERIES) (PROBE SERIES)

OPERATING SPECS:

ROLL WIDTH: MIN. _____ MAX. _____
 CORE DIA.: I.D. _____ O.D. _____
 ROLL DIA. MIN. _____ MAX. _____
 ROLL WEIGHT: MIN. _____ MAX. _____
 CORE MATERIAL: _____
 WILL ROLL OF MATERIAL TELESCOPE? ☐ YES ☐ NO

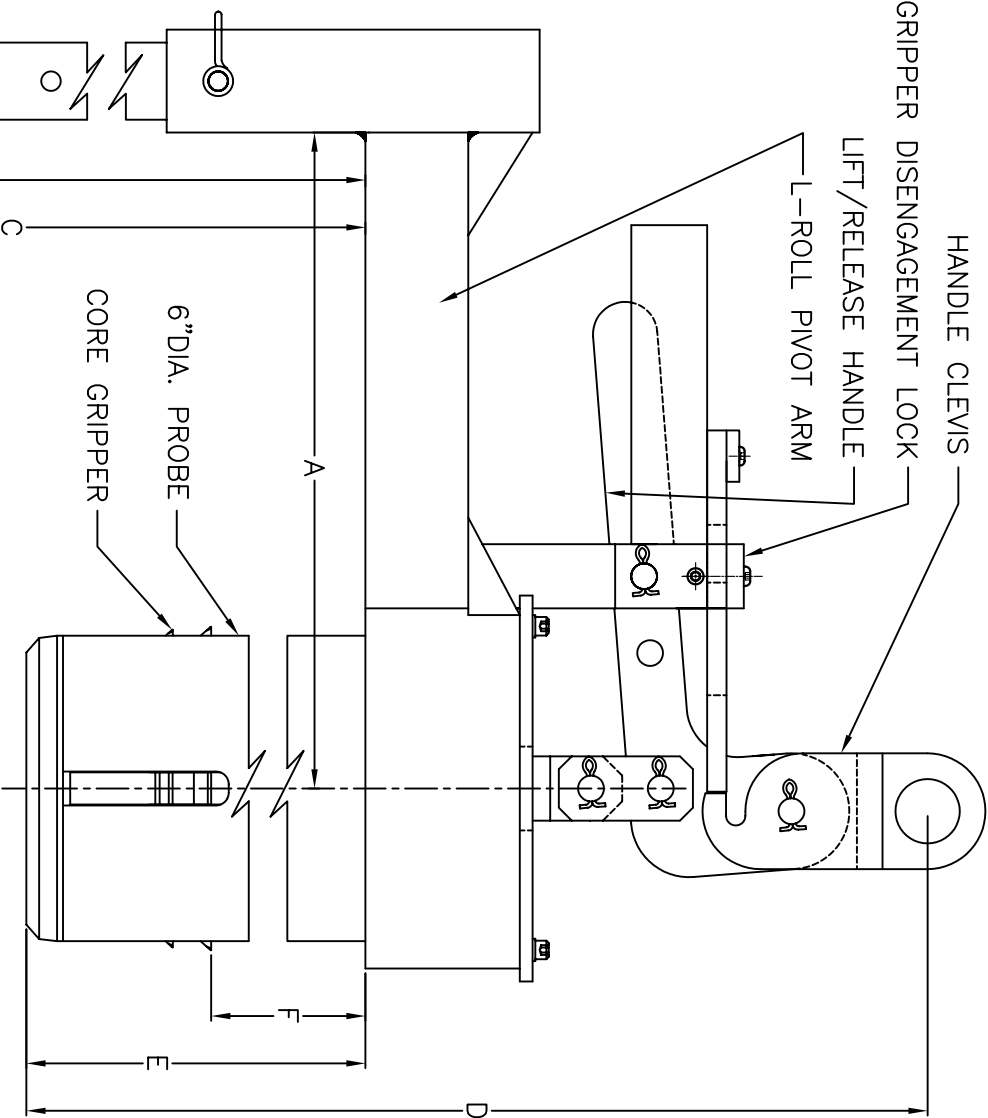

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____
 APPROVED BY: _____
 DATE: _____



CONVERTER ACCESSORY CORP. 

WIND GAP, PA

SPECIFICATION SHEET			
TITLE: COMPACT ADJUSTABLE L-ROLL PIVOT ARM			
DRAWN BY: MJT	SCALE: 1/4	QUOTE No.	
DWG. NO.: 18503-206			DISK FILE: MEMAST