


DESIGN PARAMETERS			
ADJUSTABLE L-ROLL PIVOT ARM			
SERIES#	AW4824	AW4836	AW4860
CORE SIZE	6" I.D.	6" I.D.	6" I.D.
ROLL DIA.	48" MAX.	48" MAX.	48" MAX.
ROLL WIDTH	7.5 MIN.	13.5" MIN.	25.5" MIN.
	24" MAX.	36" MAX.	60" MAX.
A	24.750	24.750	24.750
B	6.250 MIN.	12.250 MIN.	24.250 MIN.
	12.750 MAX.	18.750 MAX.	30.750 MAX.
C	7.250 MIN.	13.250 MIN.	25.250 MIN.
	13.750 MAX.	19.750 MAX.	31.750 MAX.

6" PROBE			
SERIES#	600650	600950	601350
ROLL WEIGHT	300 LBS. MAX.	600 LBS. MAX.	1000 LBS. MAX.
D	17.375	20.375	24.375
E	6.500	9.500	13.500
F	3.000	6.000	10.000

MODEL# = $\frac{A}{W}$ _____ (L-ROLL SERIES) _____ (PROBE SERIES)

OPERATING SPECS:

ROLL WIDTH: MIN. _____ MAX. _____
CORE DIA.: I.D. _____ O.D. _____
ROLL DIA. MIN. _____ MAX. _____
ROLL WEIGHT: MIN. _____ MAX. _____
CORE MATERIAL: _____
WILL ROLL OF MATERIAL TELESCOPE? ☐ YES ☐ NO

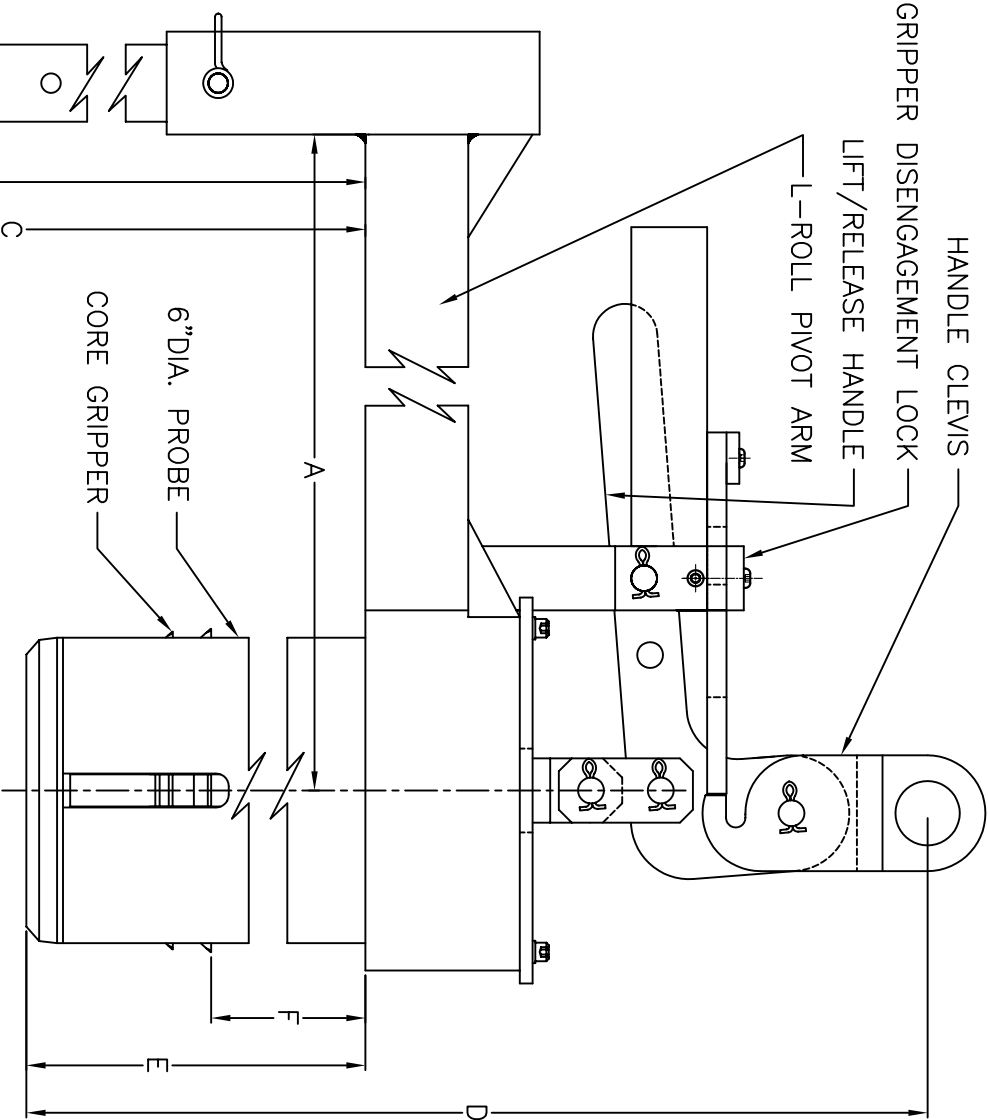

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

 CONVERTER ACCESSORY CORP. 
WIND GAP, PA

SPECIFICATION SHEET			
TITLE:		LARGE ADJUSTABLE L-ROLL PIVOT ARM	
DRAWN BY:	SCALE:	QUOTE No.	
MJT	1/4		
DWG. NO.:	DISK FILE:		
18503-208	MEMAST		