
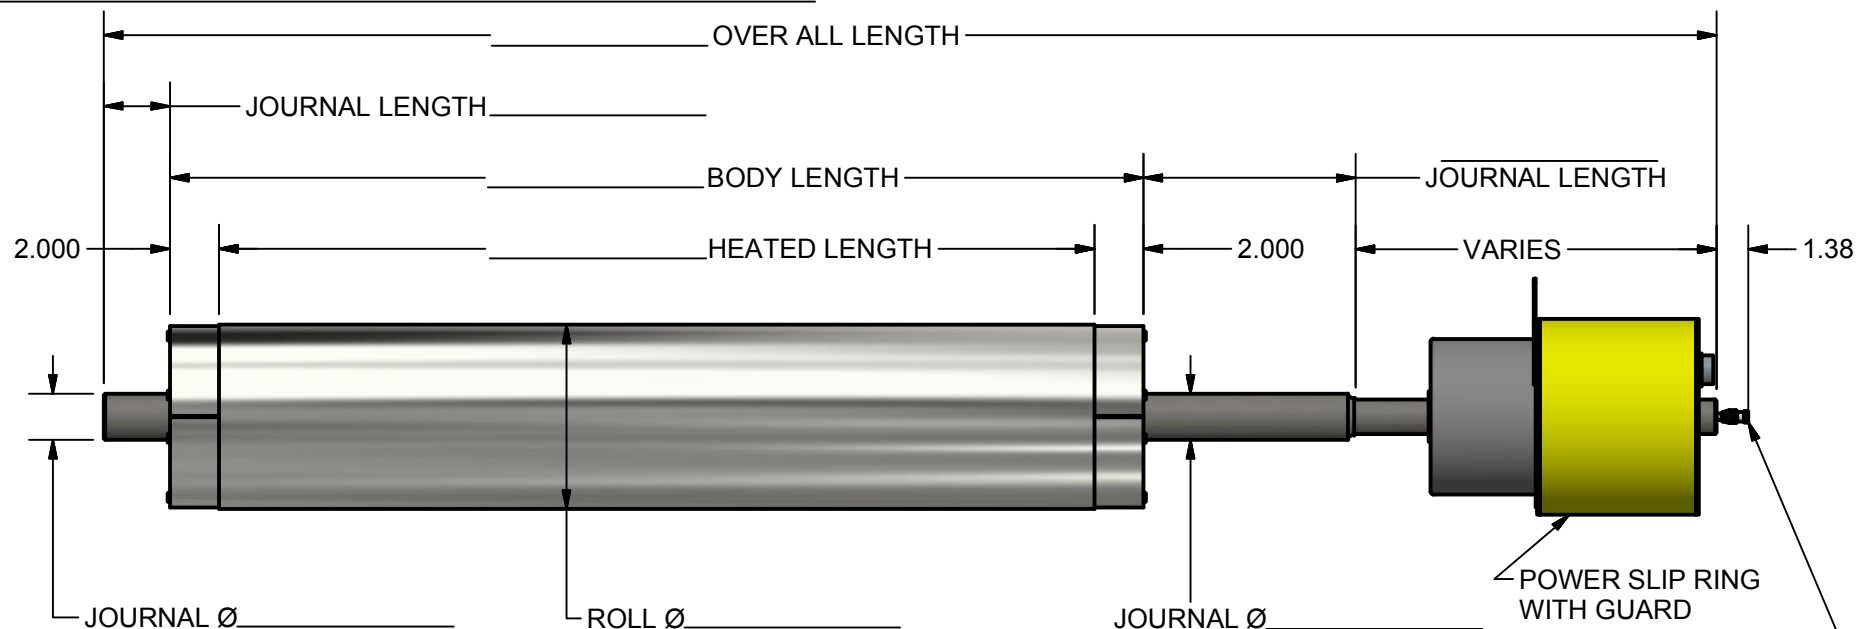


ROLL SPECIFICATIONS:
 COATING / PLATING: _____
 ROLL FINISH: _____
 ALLOWABLE TOTAL INDICATED RUNOUT: _____
 MAXIMUM TEMPERATURE: _____
 TIME ALLOWED TO ATTAIN MAXIMUM TEMPERATURE: _____
 TEMPERATURE TOLERANCE: _____
 CONTROL: ☐ AUTOMATIC ☐ NONE
 ELECTRICAL SUPPLY REQUIREMENTS: 220 VOLTS / 3 PHASE / 60 HZ
 NOTES: _____

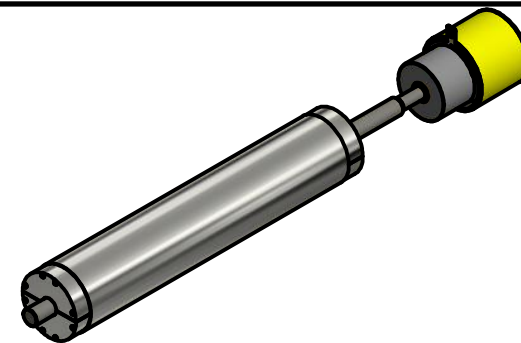

CUSTOMER: _____
 APPROVED BY: _____ DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____
 MATERIAL: _____
 THICKNESS: MIN. _____ MAX. _____
 WIDTH: MIN. _____ MAX. _____
 SPEED: MIN. _____ MAX. _____
 TENSION: MIN. _____ MAX. _____
 WEB WRAP ANGLE: _____
 MATERIAL SPECIFIC HEAT (BTU/[LB.][°F]): _____
 MATERIAL DENSITY (LB/IN³): _____
 TEMPERATURE RISE: _____
 REQUIRED WATTS: _____

THESE DRAWINGS AND SPECIFICATIONS
 CONTAIN INFORMATION WHICH
 CONVERTER ACCESSORY CORPORATION
 CONSIDERS PROPRIETARY AND
 CONFIDENTIAL.
 NO PORTION OF THIS DRAWING MAY
 BE REPRODUCED OR COPIED WITHOUT
 PRIOR WRITTEN PERMISSION OF
 CONVERTER ACCESSORY CORPORATION.

CAC CONVERTER ACCESSORY CORP.
 WIND GAP, PA 18091
 WWW.CONVERTERACCESSORY.COM

TITLE

ELECTRICALLY HEATED ROLL ASSEMBLY

SIZE	DWG NO	REV
A	18503-20D	D
DATE	DRAWN	FILE
	MEMAST	QUOTE NO.