

DUCT LENGTHS			
	DIAMETER	LENGTH	# SWEEPS
INTAKE (A)			
DISCHARGE (B)			

BLOWER MOTOR STARTER
☐ INCLUDED ☐ QUOTED OPTIONAL ☐ NONE

DISCHARGE DUCT CLAMP _____ Ø
 QUANTITY: _____

VENTURI: ☐ FX2
☐ FX3

INTAKE DUCT CLAMP _____ Ø
 QUANTITY: _____

_____ Ø STANDARD
 PICKUP NOZZLE
 TRUMPET TYPE

TRIM ENTERS
 (SUCTION)


CUSTOMER: _____
 APPROVED BY: _____ DATE: _____

TRIM REMOVAL SPECIFICATIONS:

CONTINUOUS TRIM: ☐ WIDTH: _____
 NUMBER OF TRIMS: _____
 LOCATION: EDGES: ☐ OTHER: ☐
 DESCRIBE: _____
 PIECES ☐ DESCRIBE: _____
 DID YOU SEND SAMPLES? ☐ YES ☐ NO
 NOTES: _____

OPERATING SPECIFICATIONS:

MACHINE: _____
 MATERIAL: _____
 THICKNESS: MIN. _____ MAX. _____
 WIDTH: MIN. _____ MAX. _____
 SPEED: MIN. _____ MAX. _____
 ELECTRICAL SUPPLY: ☐ 220-275/380-480/3PH/50-60HZ
☐ 110-120/220-240/1PH/50-60HZ
 OTHER: _____
 AMPS: _____
 EXPLOSION PROOF: ☐ YES ☐ NO

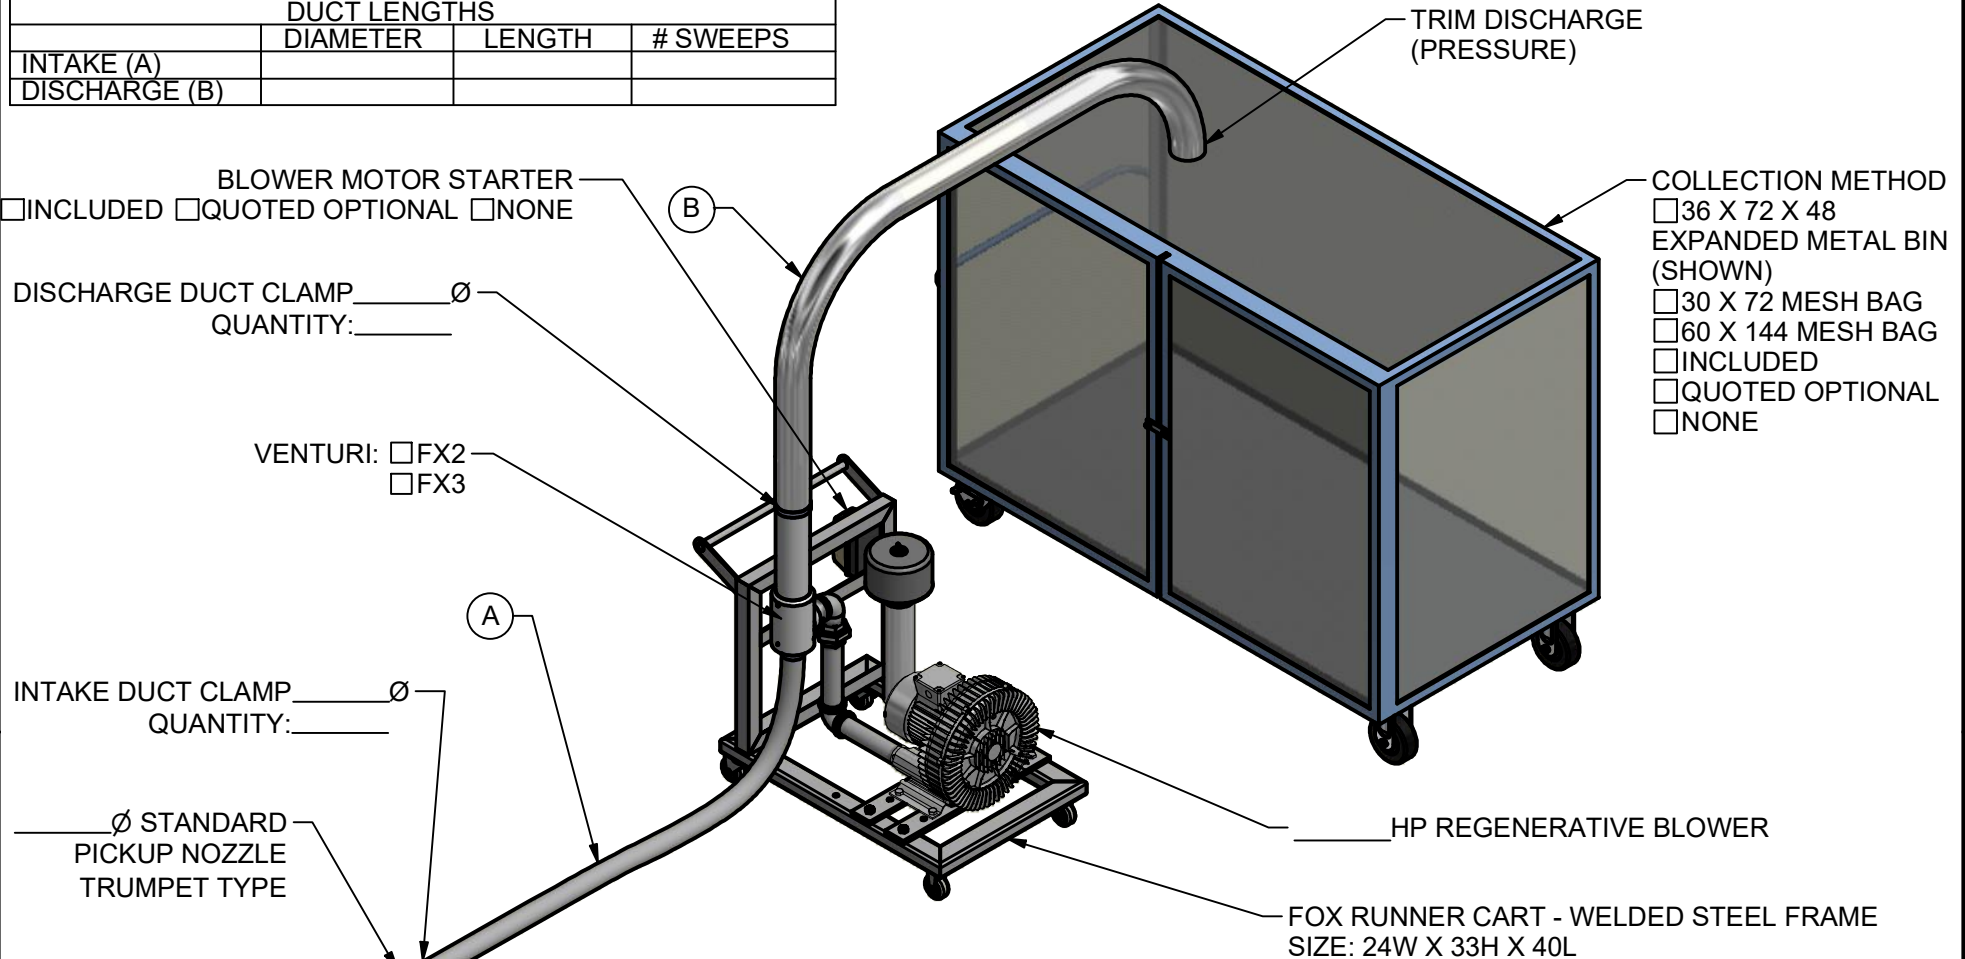

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIORWRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CAC CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
 WWW.CONVERTERACCESSORY.COM

TITLE
**FOX RUNNER SINGLE PICKUP
 PORTABLE TRIM REMOVAL SYSTEM**

SIZE A	DWG NO 18503-212A	REV A
DATE	DRAWN MEMAST	QUOTE NO.