

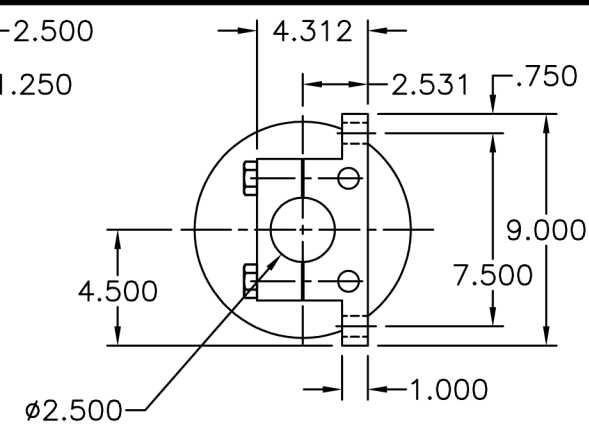


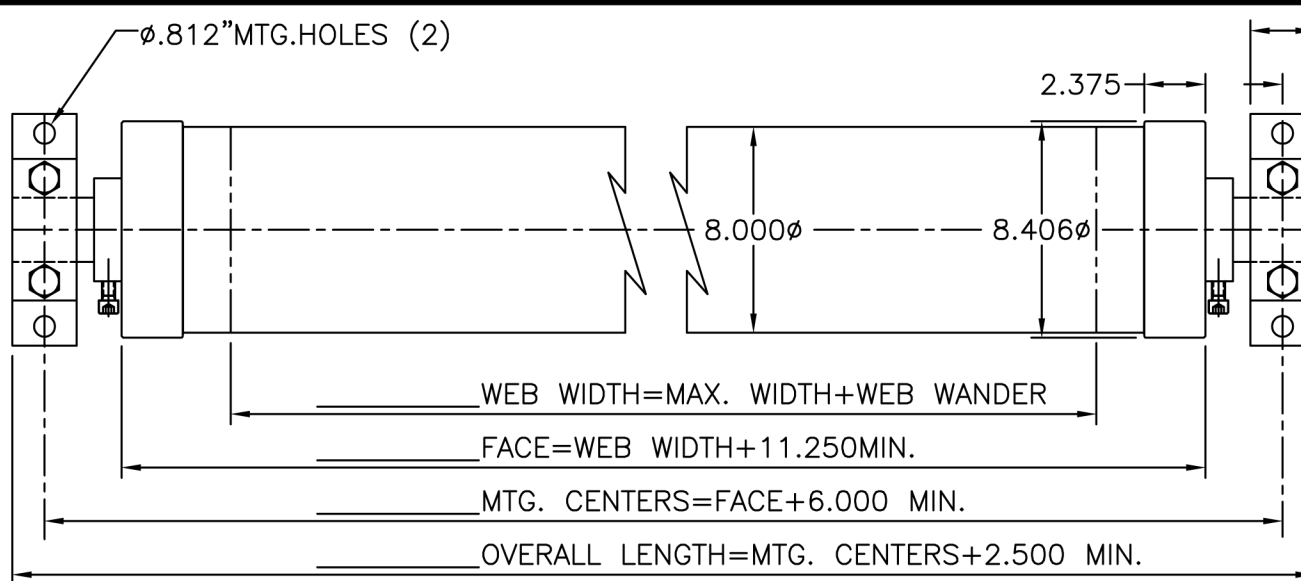


NOTE:
STD. COMPONENTS WILL BE USED
UNLESS OTHERWISE SPECIFIED

OPTIONAL DRIVE SHEAVE

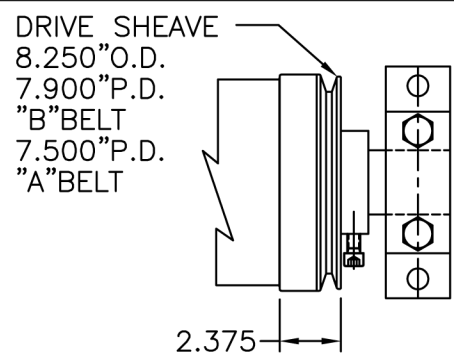

FLANGE MOUNTING

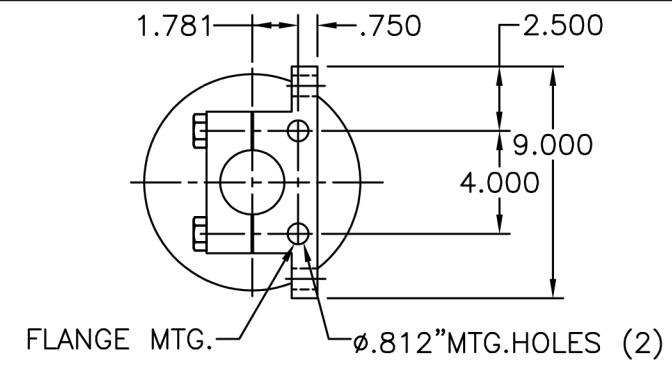

OPTIONS:

MOUNTING BRACKETS:
☐ STD. (PILLOW BLOCK) ☐ FLANGE ☐ NONE
☐ DRIVE SHEAVE
 RUBBER SLEEVE:
☐ NATURAL TAN NEOPRENE, 50 DURO HARDNESS
☐ SPECIAL RUBBER: _____
 DUROMETER HARDNESS: _____

DESIGN PARAMETERS:

MAX. ROLL SPEED: 3000 FPM
 MAX. TENSION: 12 PLI
 MIN. TURNING FORCE: .25 PLI
 WT. 75# + 3.8#/IN. OF FACE
 DEAD SHAFT CONSTRUCTION

OPERATING SPECS.:

MACHINE: _____
 MATERIAL: _____
 THICKNESS: MIN. _____ MAX. _____
 WIDTH: MIN. _____ MAX. _____
 WEB WANDER: _____ MAX. $\pm$ _____
 SPEED: MIN. _____ MAX. _____
 TENSION: MIN. _____ MAX. _____
 WRAP ANGLE: _____
 TEMP. AT SLEEVE: _____
 IS OZONE PRESENT? ☐ YES ☐ NO
 CHEMICAL CONTACT WITH SLEEVE? ☐ YES ☐ NO
 IF YES, SPECIFY: _____

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION
 WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS
 PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS
 DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
 WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CUSTOMER: _____
 APPROVED BY: _____
 DATE: _____

 **CONVERTER ACCESSORY CORP.**
 WIND GAP, PA

SPECIFICATION SHEET		
TITLE: MULTI-ADJUST 8.00 WRINKLESTOP SPREADER ROLL		
DRAWN BY: MJT	SCALE: 1/8	QUOTE No.
DWG. NO.: 18503-220	DISK FILE: MEMAST	