


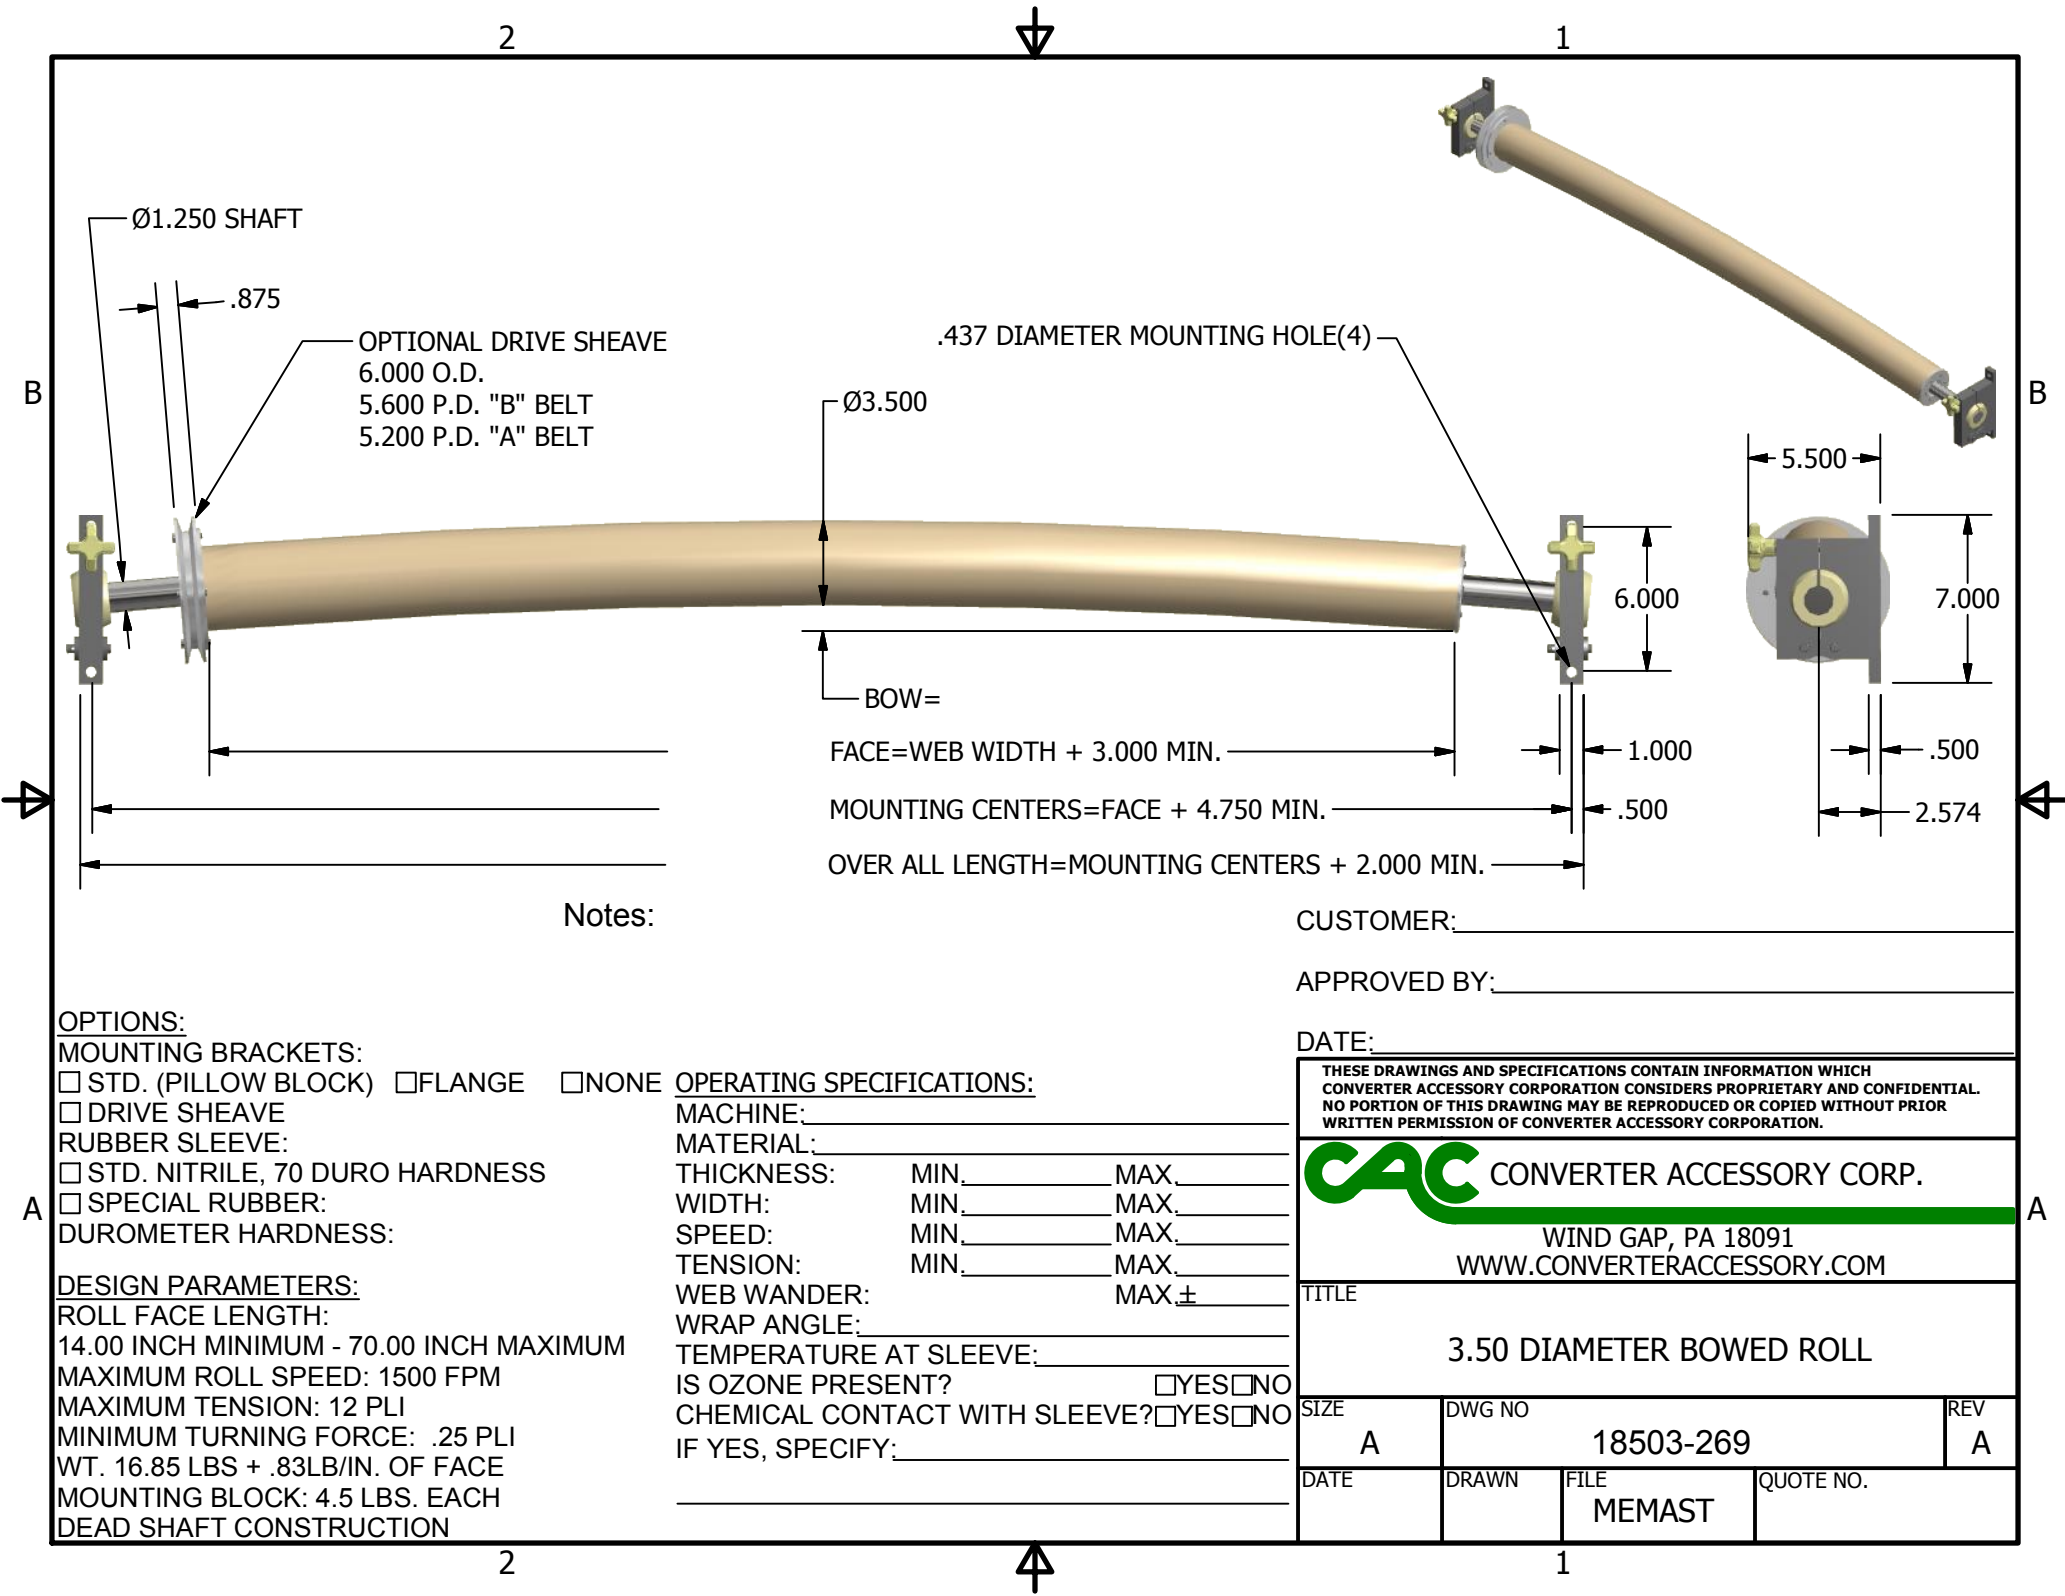

Notes:

CUSTOMER: _____

APPROVED BY: _____

DATE: _____

OPTIONS:

MOUNTING BRACKETS:

☐ STD. (PILLOW BLOCK) ☐ FLANGE ☐ NONE

☐ DRIVE SHEAVE

RUBBER SLEEVE:

☐ STD. NITRILE, 70 DURO HARDNESS

☐ SPECIAL RUBBER:

DUROMETER HARDNESS:

DESIGN PARAMETERS:

ROLL FACE LENGTH:

14.00 INCH MINIMUM - 70.00 INCH MAXIMUM

MAXIMUM ROLL SPEED: 1500 FPM

MAXIMUM TENSION: 12 PLI

MINIMUM TURNING FORCE: .25 PLI

WT. 16.85 LBS + .83LB/IN. OF FACE

MOUNTING BLOCK: 4.5 LBS. EACH

DEAD SHAFT CONSTRUCTION

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____

SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

WEB WANDER: _____ MAX. $\pm$ _____

WRAP ANGLE: _____


TEMPERATURE AT SLEEVE: _____

IS OZONE PRESENT? ☐ YES ☐ NO

CHEMICAL CONTACT WITH SLEEVE? ☐ YES ☐ NO

IF YES, SPECIFY: _____

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE
3.50 DIAMETER BOWED ROLL

SIZE A	DWG NO 18503-269	REV A
DATE	DRAWN FILE MEMAST	QUOTE NO.