
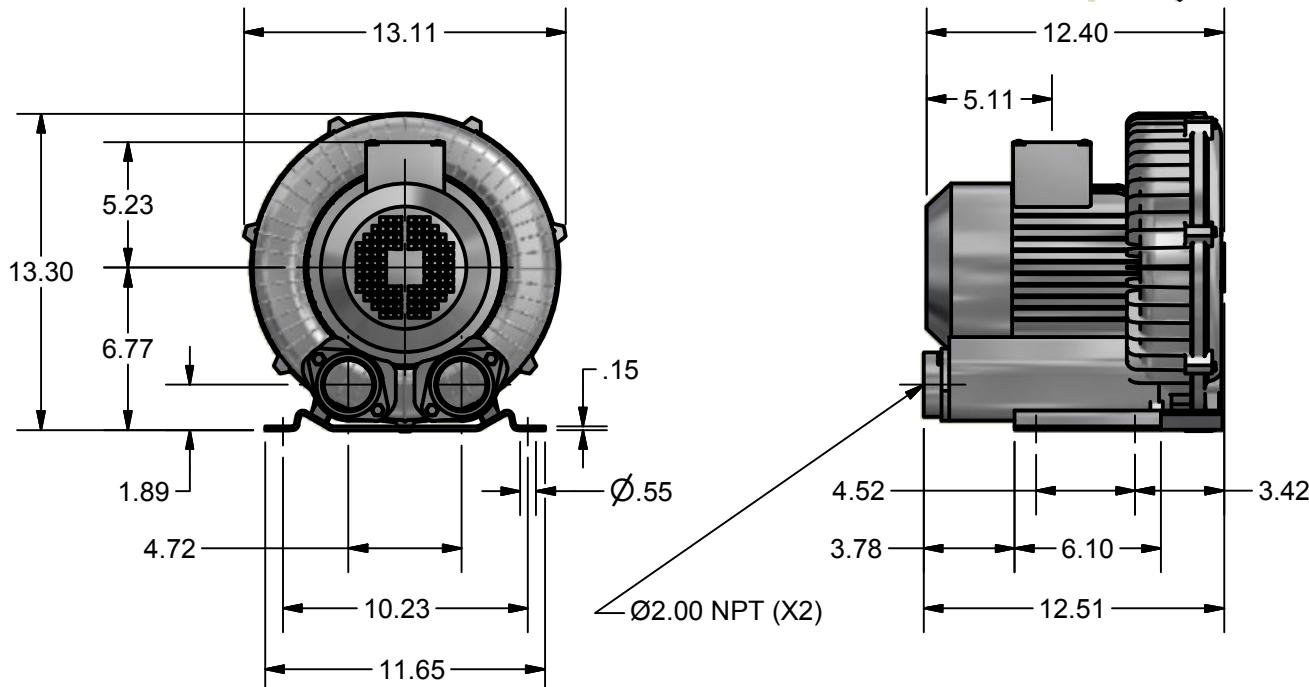


MODEL NO.	CURVE NO.	FLOW (CFM)	MAX. PRESSURE (INCH WATER)	MAX. VACUUM	SOUND LEVEL (db)	INLET / OUTLET NPT
500AB	A6	110	80	72	70	2.00"

PHASE	VOLTAGE	CURRENT	KW	HP	WEIGHT (LBS)
1	110-120/220-240	23.0/11.5	1.5	2.00	57

## PRESSURE PERFORMANCE CURVE

1 PHASE

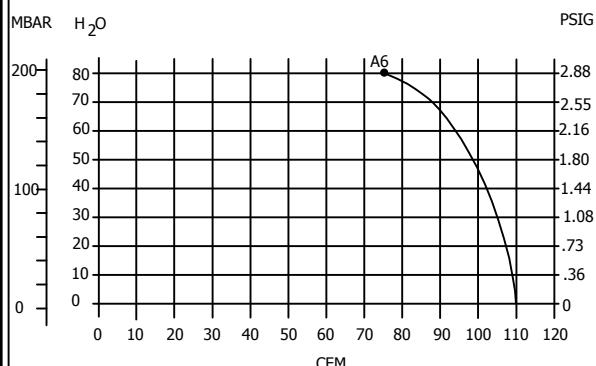

CUSTOMER:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

ACCESSORIES: PART NO.

FILTER CANISTER: 20222-238  
 FILTER ELEMENT: 20222-237  
 SILENCER: 20222-229  
 ENCLOSED MOTOR STARTER (120V): 20222-254  
 ENCLOSED MOTOR STARTER (240V): 20222-255

NOTES:  
 \_\_\_\_\_  
 \_\_\_\_\_  
 \_\_\_\_\_

SHOWN, PART#20222-222

THESE DRAWINGS AND SPECIFICATIONS  
 CONTAIN INFORMATION WHICH  
 CONVERTER ACCESSORY CORPORATION  
 CONSIDERS PROPRIETARY AND  
 CONFIDENTIAL.  
 NO PORTION OF THIS DRAWING MAY  
 BE REPRODUCED OR COPIED WITHOUT  
 PRIOR WRITTEN PERMISSION OF  
 CONVERTER ACCESSORY CORPORATION.

TITLE		MODEL#500AB REGENERATIVE BLOWER		
SIZE	DWG NO	18503-278	REV	
DATE	DRAWN	FILE MEMAST	QUOTE NO.	