
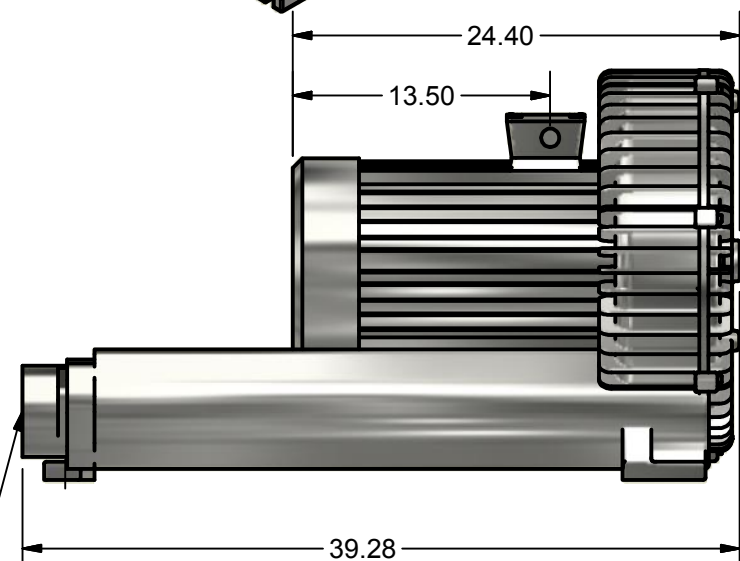
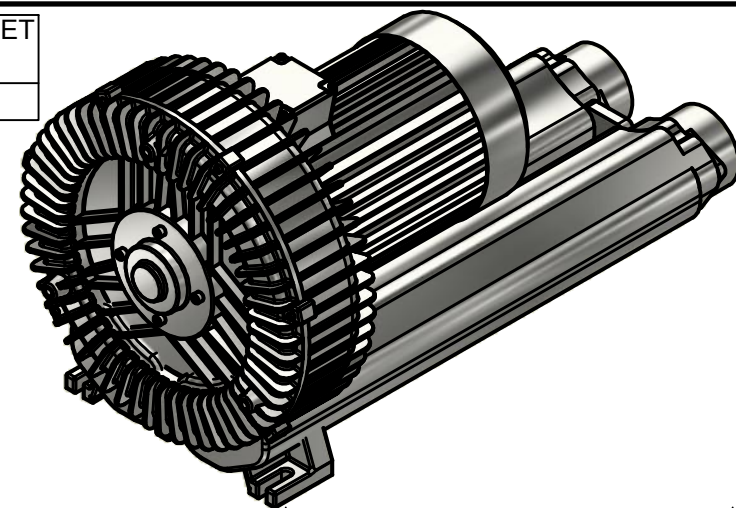
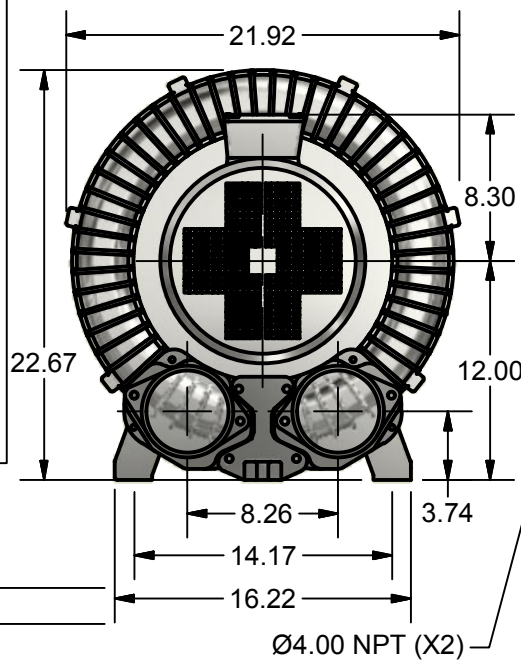


MODEL NO.	CURVE NO.	FLOW (CFM)	MAX. PRESSURE (INCH WATER)	MAX. VACUUM	SOUND LEVEL (db)	INLET / OUTLET NPT
1015AB	A25	791	108	114	81	4"

PHASE	VOLTAGE	CURRENT	KW	HP	WEIGHT (LBS)
3	220-275/380-480	51.5Δ/29.8Y	15.3	20.00	247

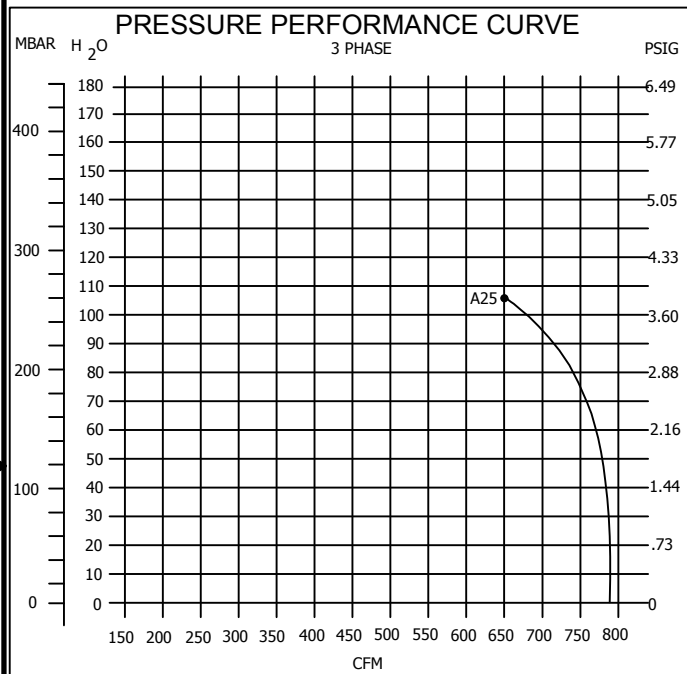

CUSTOMER: _____
 APPROVED BY: _____ DATE: _____

ACCESSORIES:	PART NO.
FILTER CANISTER:	20222-240
FILTER ELEMENT:	20222-241
SILENCER:	20222-231
ENCLOSED MOTOR STARTER (230V):	20222-268
ENCLOSED MOTOR STARTER (460V):	20222-269
VARIABLE FREQUENCY DRIVE (230V):	20222-270
VARIABLE FREQUENCY DRIVE (460V):	20222-271

NOTES: _____

SHOWN, PART#20222-226

THESE DRAWINGS AND SPECIFICATIONS
 CONTAIN INFORMATION WHICH
 CONVERTER ACCESSORY CORPORATION
 CONSIDERS PROPRIETARY AND
 CONFIDENTIAL.
 NO PORTION OF THIS DRAWING MAY
 BE REPRODUCED OR COPIED WITHOUT
 PRIOR WRITTEN PERMISSION OF
 CONVERTER ACCESSORY CORPORATION.

 CONVERTER ACCESSORY CORP. WIND GAP, PA 18091 WWW.CONVERTERACCESSORY.COM			
MODEL#1015AB REGENERATIVE BLOWER			
SIZE A	DWG NO 18503-282		REV
DATE	DRAWN	FILE MEMAST	QUOTE NO.