
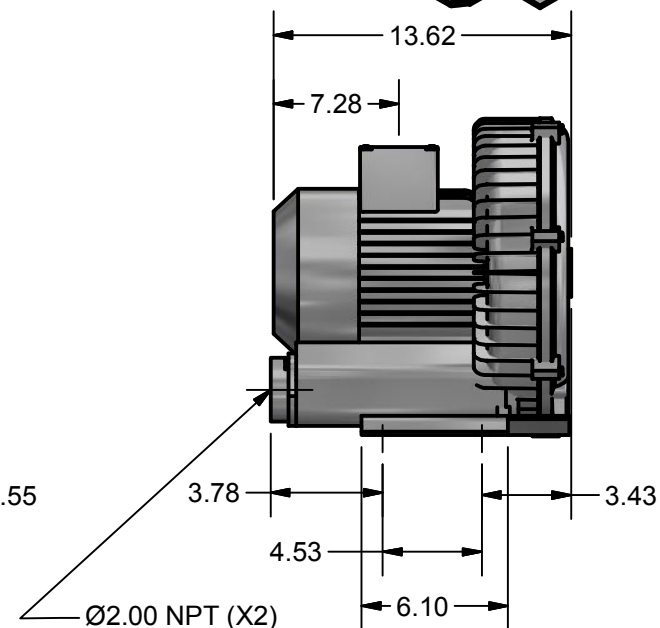
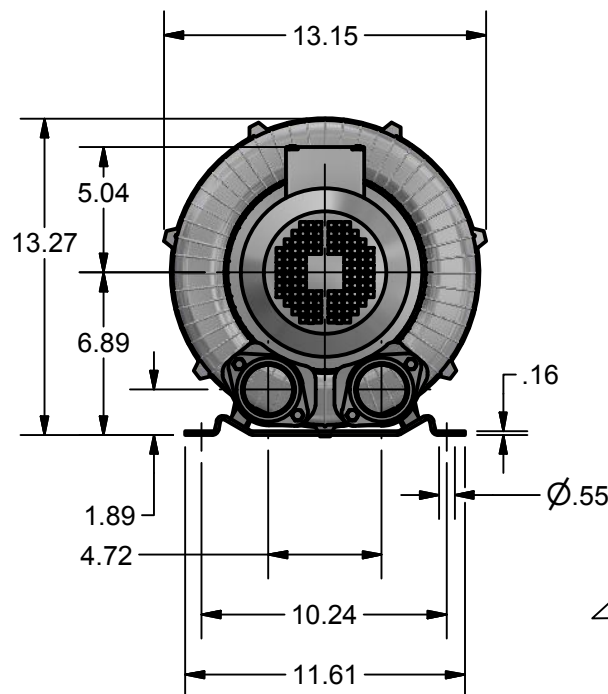


MODEL NO.	CURVE NO.	FLOW (CFM)	MAX. PRESSURE (INCH WATER)	MAX. VACUUM	SOUND LEVEL (db)	INLET / OUTLET NPT
600AB	A16	155	118	105	70	2.00"

PHASE	VOLTAGE	CURRENT	KW	HP	WEIGHT (LBS)
3	220-275/380-480	9.5Δ/5.5Y	2.55	3.5	51

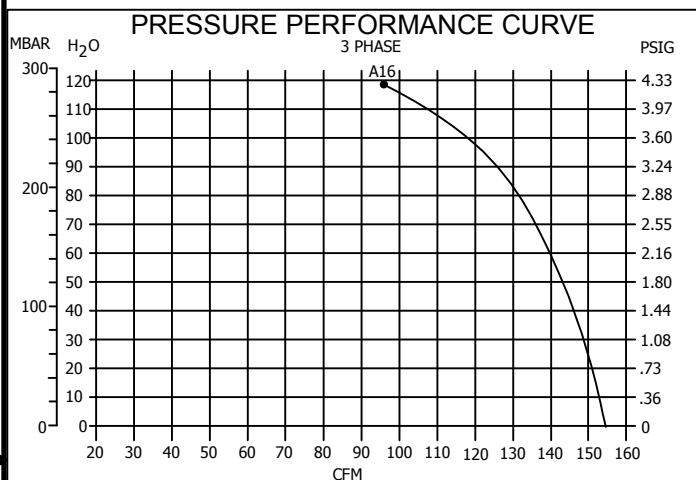

CUSTOMER: _____

APPROVED BY: _____

DATE: _____

ACCESSORIES: _____ PART NO. _____

FILTER CANISTER: 20222-236

FILTER ELEMENT: 20222-237

SILENCER: 20222-229

ENCLOSED MOTOR STARTER (230V): 20222-256

ENCLOSED MOTOR STARTER (460V): 20222-257

VARIABLE FREQUENCY DRIVE (230V): 20222-258A

VARIABLE FREQUENCY DRIVE (460V): 20222-259A

NOTES: _____

SHOWN, PART#20222-286

THESE DRAWINGS AND SPECIFICATIONS
CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION
CONSIDERS PROPRIETARY AND
CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY
BE REPRODUCED OR COPIED WITHOUT
PRIOR WRITTEN PERMISSION OF
CONVERTER ACCESSORY CORPORATION.

CAC CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE			
MODEL#600AB REGENERATIVE BLOWER			
SIZE	DWG NO	REV	
A	18503-285		
DATE	DRAWN	FILE	QUOTE NO.
		MEMAST	