
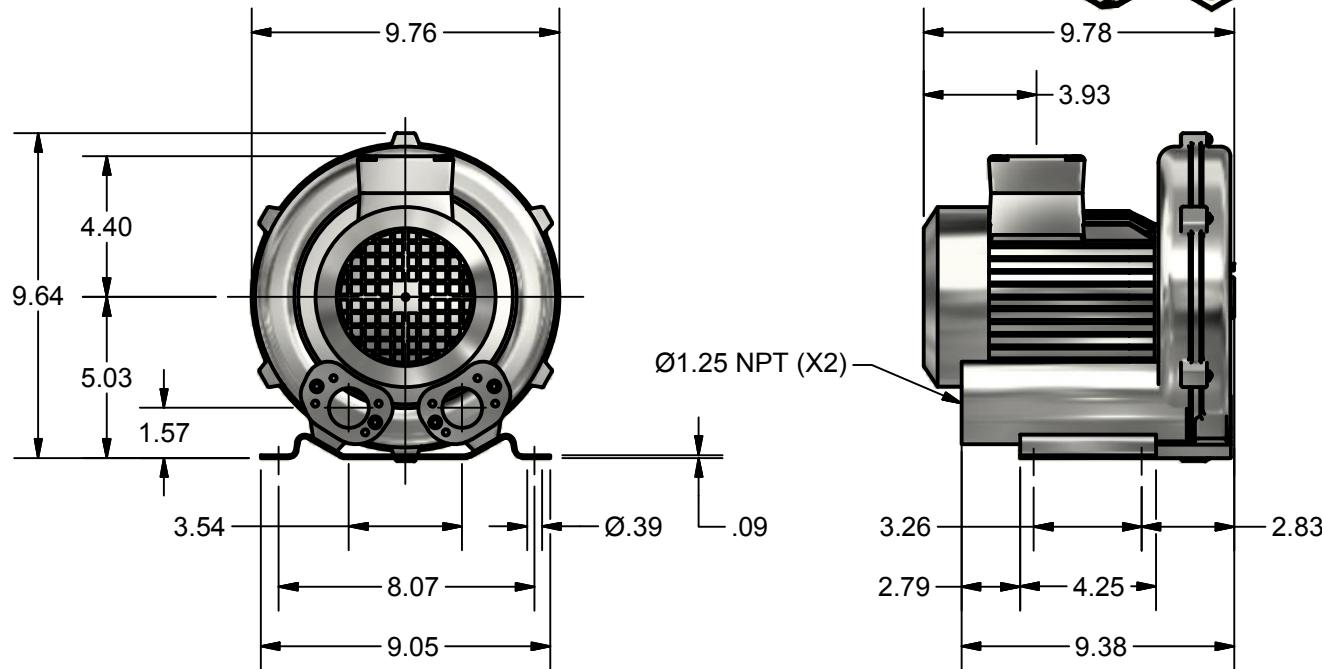


MODEL NO.	CURVE NO.	FLOW (CFM)	MAX. PRESSURE (INCH WATER)	MAX. VACUUM	SOUND LEVEL (db)	INLET / OUTLET NPT
400AB	A13	64	64	60	61	1.25"

PHASE	VOLTAGE	CURRENT	KW	HP	WEIGHT (LBS)
3	220-275/380-480	2.3Δ / 1.3Y	0.5	0.67	24

## PRESSURE PERFORMANCE CURVE

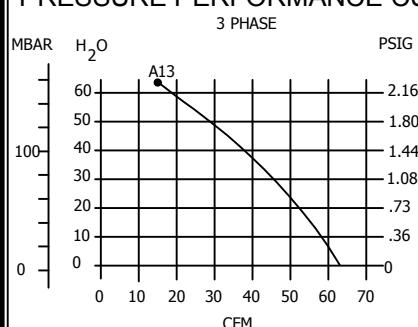

CUSTOMER:

APPROVED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

## ACCESSORIES:

	PART NO.
FILTER CANISTER:	20222-232
FILTER ELEMENT:	20222-233
SILENCER:	20222-227
ENCLOSED MOTOR STARTER (230V):	20222-244
ENCLOSED MOTOR STARTER (460V):	20222-245
VARIABLE FREQUENCY DRIVE (230V):	20222-246
VARIABLE FREQUENCY DRIVE (460V):	20222-247

NOTES: \_\_\_\_\_

**CAC** CONVERTER ACCESSORY CORP.

 WIND GAP, PA 18091  
 WWW.CONVERTERACCESSORY.COM

SHOWN, PART#20222-219

THESE DRAWINGS AND SPECIFICATIONS  
 CONTAIN INFORMATION WHICH  
 CONVERTER ACCESSORY CORPORATION  
 CONSIDERS PROPRIETARY AND  
 CONFIDENTIAL.  
 NO PORTION OF THIS DRAWING MAY  
 BE REPRODUCED OR COPIED WITHOUT  
 PRIOR WRITTEN PERMISSION OF  
 CONVERTER ACCESSORY CORPORATION.

TITLE		SIZE		
MODEL#400AB REGENERATIVE BLOWER		DWG NO		
DATE	DRAWN	FILE	REV	
		MEMAST	18503-299	