


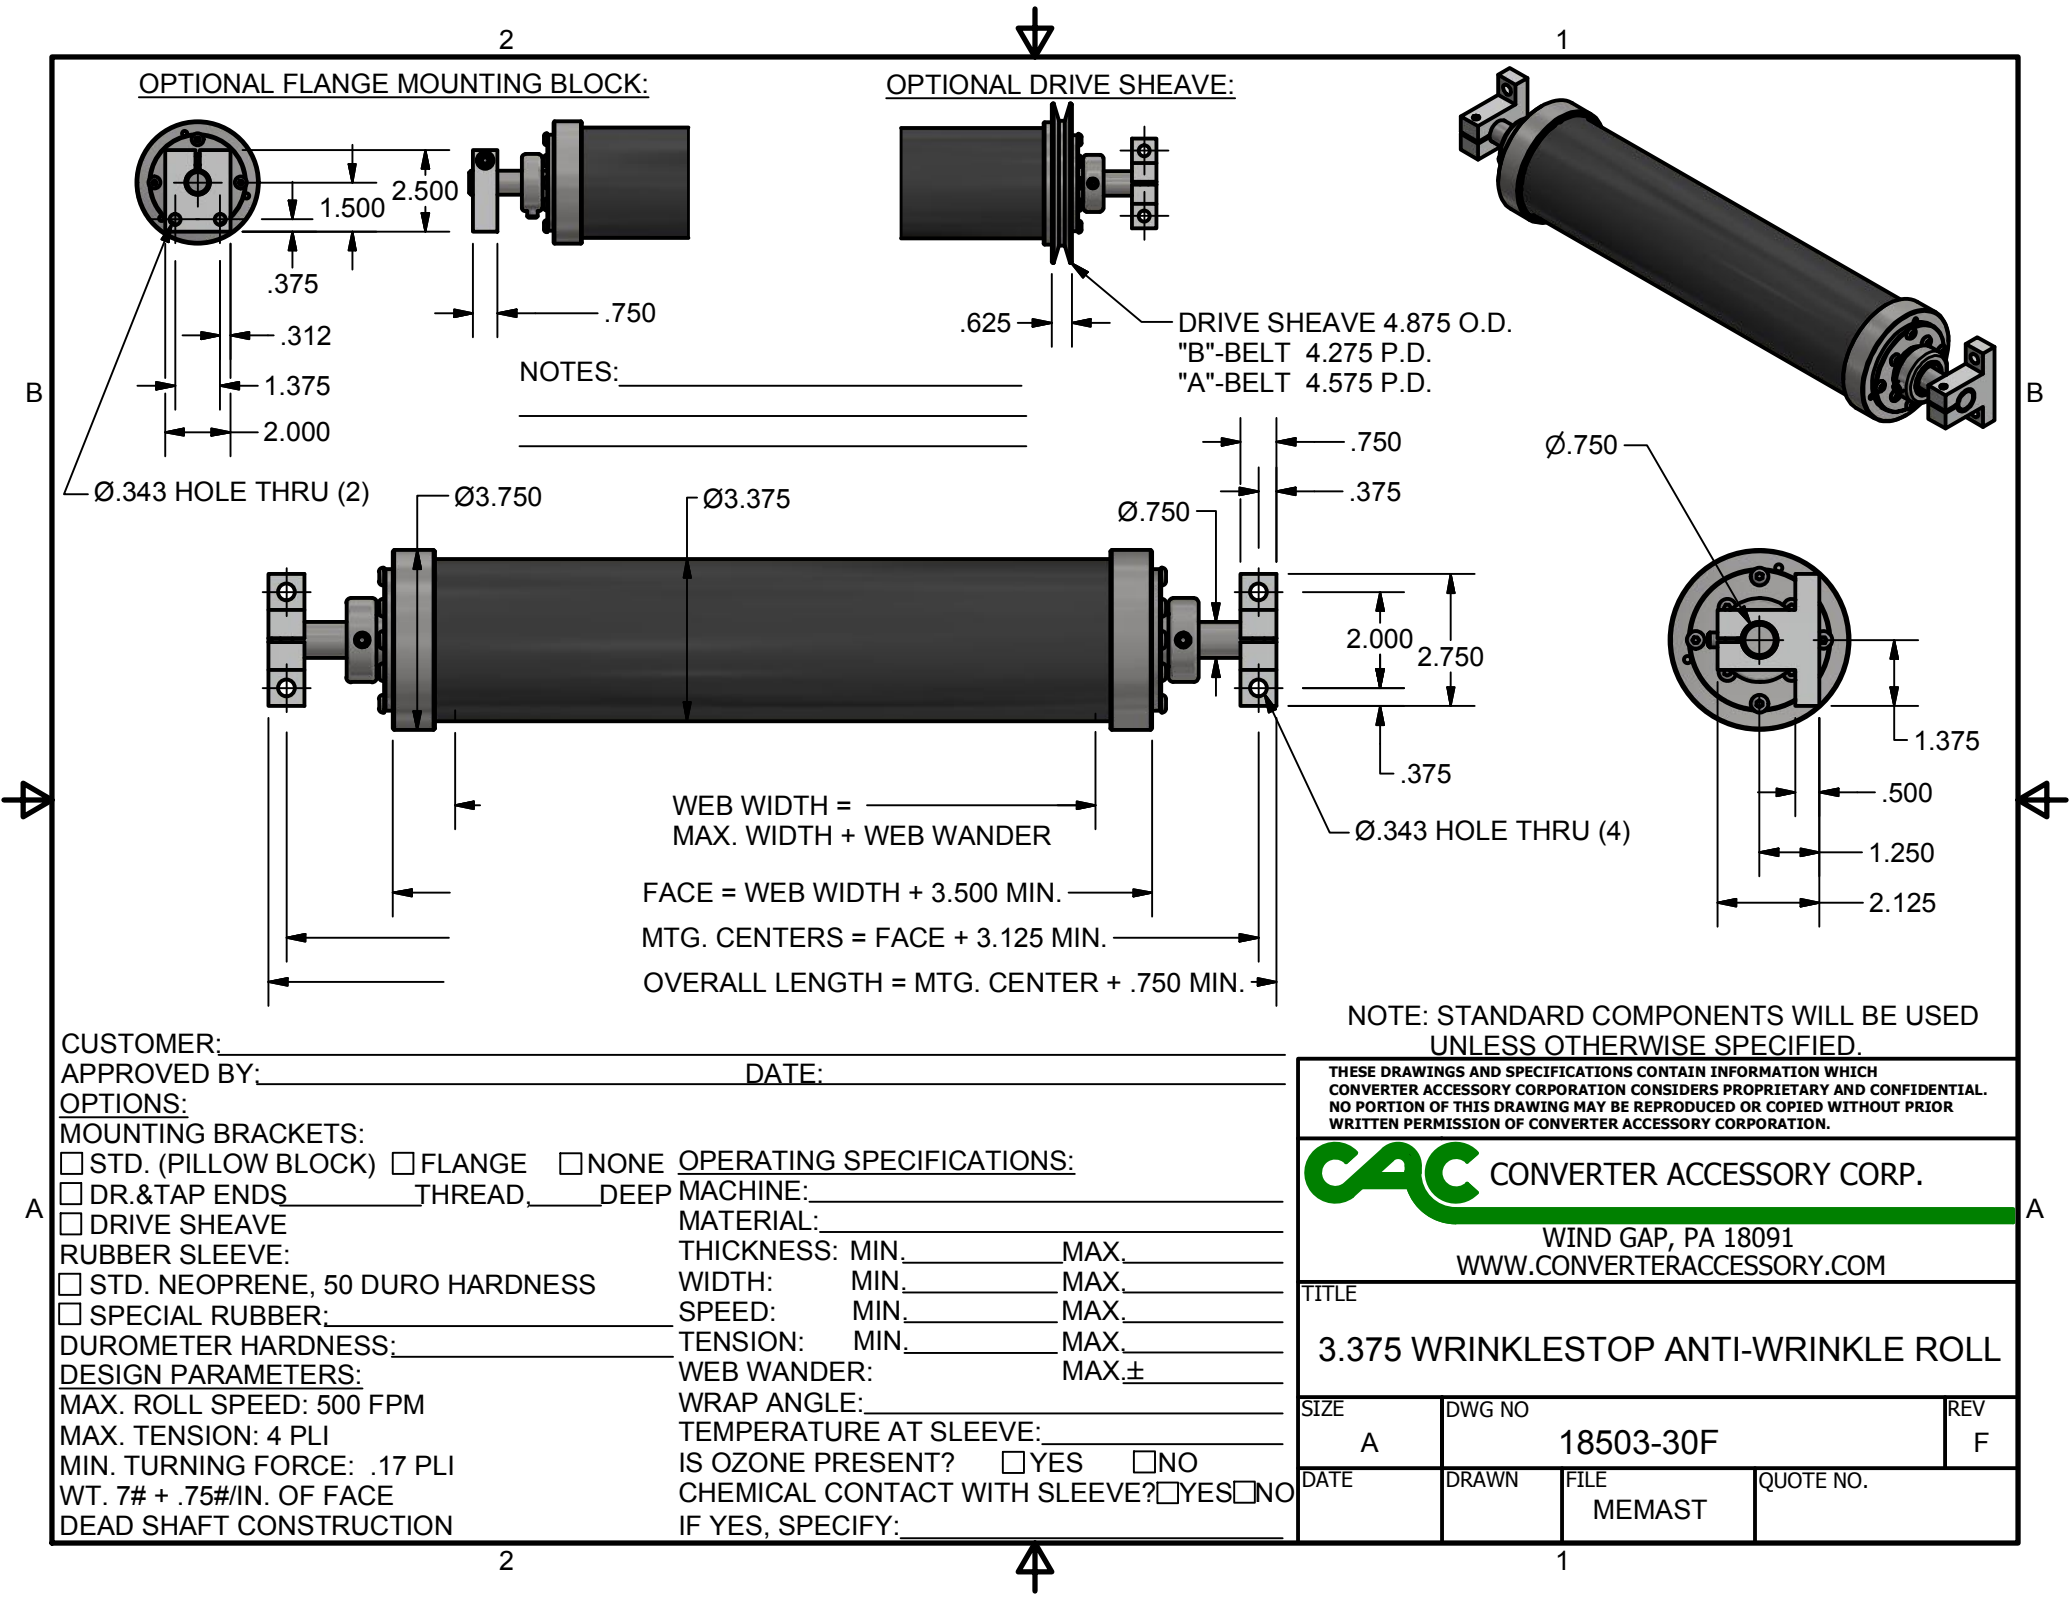

OPTIONAL FLANGE MOUNTING BLOCK:

OPTIONAL DRIVE SHEAVE:

DRIVE SHEAVE 4.875 O.D.
"B"-BELT 4.275 P.D.
"A"-BELT 4.575 P.D.

NOTES: _____

Ø.343 HOLE THRU (2)

Ø3.750

Ø3.375

Ø.750

WEB WIDTH = _____
MAX. WIDTH + WEB WANDER

FACE = WEB WIDTH + 3.500 MIN.

MTG. CENTERS = FACE + 3.125 MIN.

OVERALL LENGTH = MTG. CENTER + .750 MIN.

Ø.750

2.000
2.750

.375

Ø.343 HOLE THRU (4)

1.375

.500

1.250

2.125

CUSTOMER: _____

APPROVED BY: _____

DATE: _____

OPTIONS:

MOUNTING BRACKETS:

☐ STD. (PILLOW BLOCK) ☐ FLANGE ☐ NONE

☐ DR.&TAP ENDS _____ THREAD, _____ DEEP

☐ DRIVE SHEAVE

RUBBER SLEEVE:

☐ STD. NEOPRENE, 50 DURO HARDNESS

☐ SPECIAL RUBBER: _____

DUROMETER HARDNESS: _____

DESIGN PARAMETERS:

MAX. ROLL SPEED: 500 FPM

MAX. TENSION: 4 PLI

MIN. TURNING FORCE: .17 PLI

WT. 7# + .75#/IN. OF FACE

DEAD SHAFT CONSTRUCTION

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____

SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

WEB WANDER: _____ MAX. ± _____

WRAP ANGLE: _____

TEMPERATURE AT SLEEVE: _____

IS OZONE PRESENT? ☐ YES ☐ NO

CHEMICAL CONTACT WITH SLEEVE? ☐ YES ☐ NO

IF YES, SPECIFY: _____

NOTE: STANDARD COMPONENTS WILL BE USED
UNLESS OTHERWISE SPECIFIED.

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091

WWW.CONVERTERACCESSORY.COM

TITLE

3.375 WRINKLESTOP ANTI-WRINKLE ROLL

SIZE

A

DWG NO

18503-30F

REV

F

DATE

DRAWN

FILE

MEMAST

QUOTE NO.