
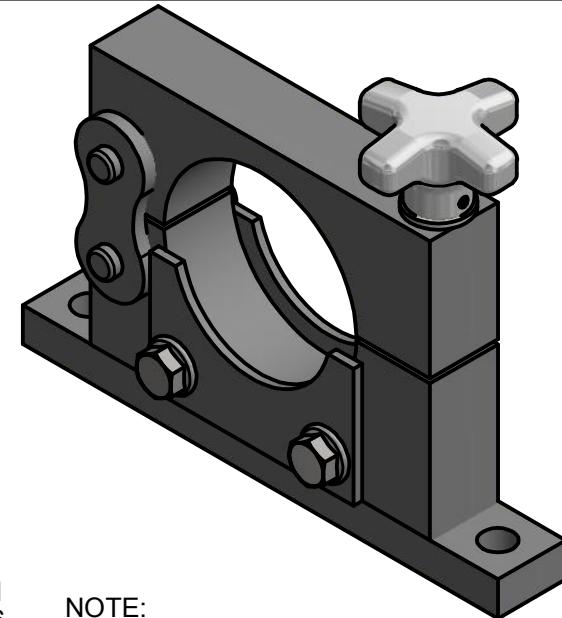
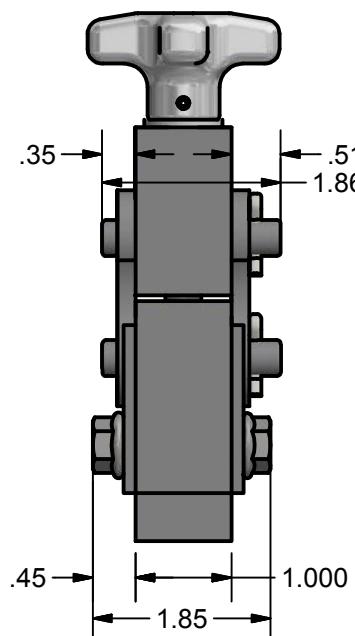


2  
1  
B  
B  
.500 6.000 2.00  
1.000 .500  
∅.437 MOUNTING HOLE (2)  
R6.50 OPENING CLEARANCE  
REQUIRED

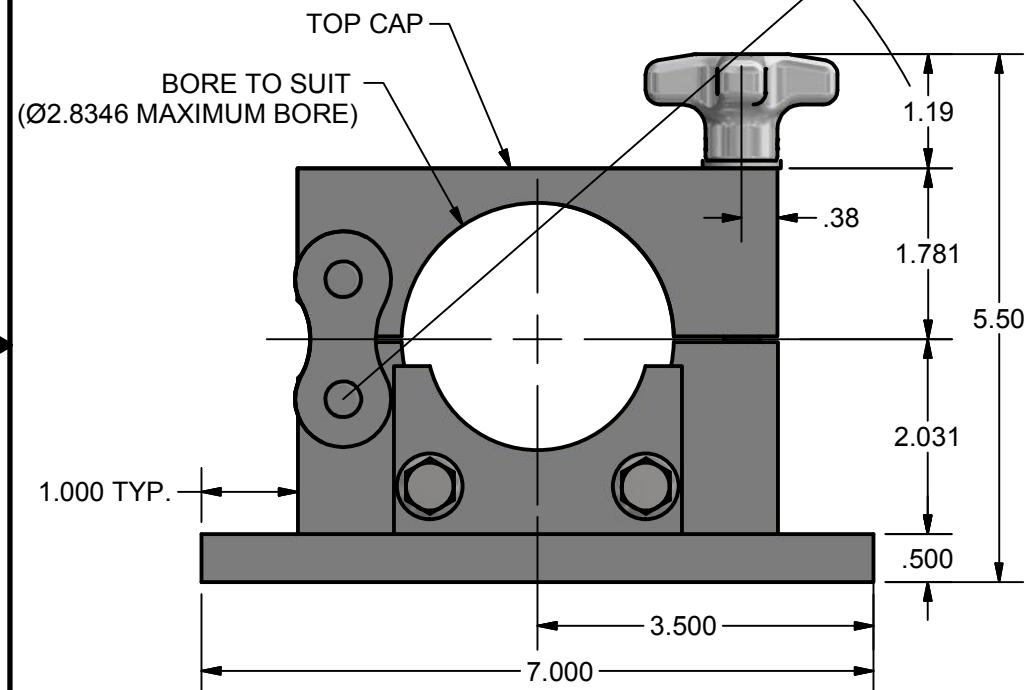

NOTE:  
 1) MOUNT AS SHOWN,  
 HORIZONTAL WITH TOP CAP UP.  
 2) MAXIMUM LOAD CAPACITY  
 500 LBS EACH / 1000 LBS PER PAIR  
 3) BORE SIZE REQUIRED:  
 (Ø2.8346 MAXIMUM)  
 4)

CUSTOMER: \_\_\_\_\_  
 APPROVED BY: \_\_\_\_\_ DATE: \_\_\_\_\_

OPERATING SPECIFICATIONS:

MACHINE: \_\_\_\_\_

MATERIAL: \_\_\_\_\_

THICKNESS: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

WIDTH: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

SPEED: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

TENSION: MIN. \_\_\_\_\_ MAX. \_\_\_\_\_

CORE SIZE: \_\_\_\_\_

MAXIMUM ROLL DIAMETER: \_\_\_\_\_

MAXIMUM ROLL WEIGHT: \_\_\_\_\_

PART NUMBER: 47265-19

THESE DRAWINGS AND SPECIFICATIONS  
 CONTAIN INFORMATION WHICH  
 CONVERTER ACCESSORY CORPORATION  
 CONSIDERS PROPRIETARY AND  
 CONFIDENTIAL.  
 NO PORTION OF THIS DRAWING MAY  
 BE REPRODUCED OR COPIED WITHOUT  
 PRIOR WRITTEN PERMISSION OF  
 CONVERTER ACCESSORY CORPORATION.

TITLE			
SIMPLOK STANDARD DUTY SHAFT HOLDER WITH FLANGE			
SIZE	DWG NO	REV	
A	18503-319		
DATE	DRAWN	FILE	QUOTE NO.
		MEMAST	