

TORQUE OUTPUT				
BRAKE MODEL	6410	6430	6445	
COEFFICIENT OF FRICTION	.10	.30	.45	
TORQUE LB. / IN.	MIN.	2.2	6.6	10
	MAX.	660	2000	3000

HORSE POWER					
600	2.87	1250	4.63	1900	6.00
550	2.72	1200	4.51	1850	5.90
500	2.56	1150	4.39	1800	5.81
450	2.40	1100	4.26	1750	5.71
400	2.23	1050	4.14	1700	5.61
350	2.06	1000	4.01	1650	5.51
300	1.89	950	3.88	1600	5.41
250	1.72	900	3.74	1550	5.31
200	1.54	850	3.60	1500	5.20
150	1.36	800	3.46	1450	5.09
100	1.18	750	3.32	1400	4.98
50	.99	700	3.17	1350	4.87
0	.80	650	3.02	1300	4.75
ECS	HP	ECS	HP	ECS	HP

ECS=EFFECTIVE COOLING SPEED

www.converteraccessory.com/ss/tqrpmhp.htm

CUSTOMER: _____

APPROVED BY: _____

DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____


SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

CORE DIA.: _____

MAX. ROLL DIA.: _____

MAX. ROLL WEIGHT: _____

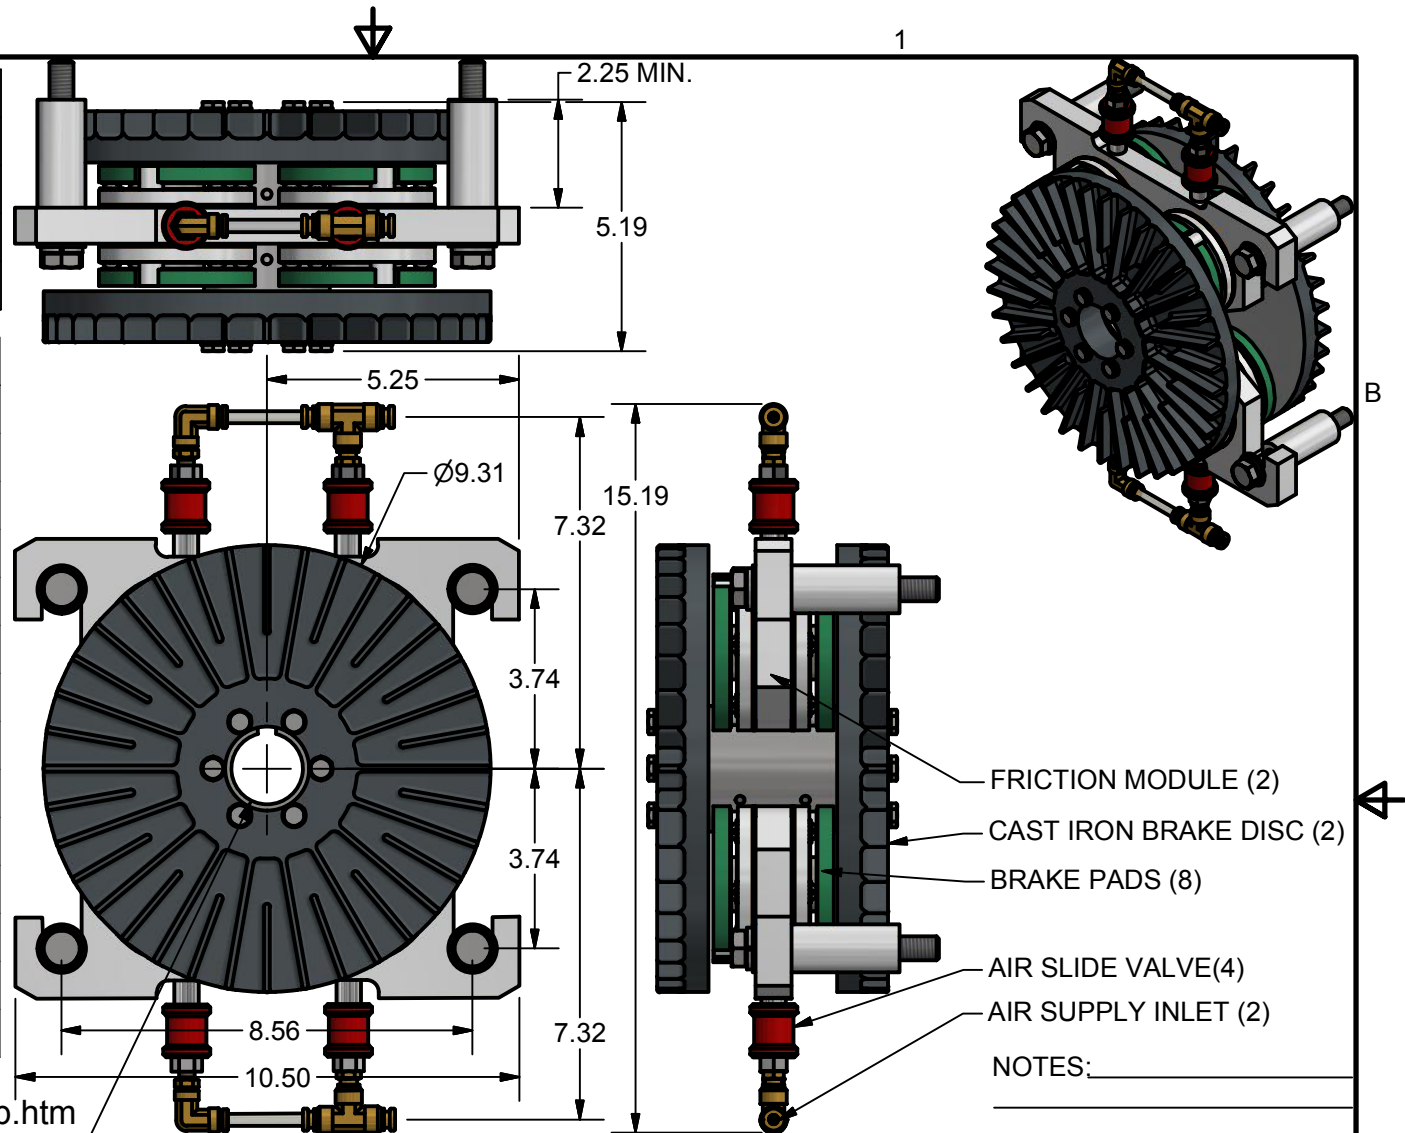

NOTES: _____

 CONVERTER ACCESSORY CORP. WIND GAP, PA 18091 WWW.CONVERTERACCESSORY.COM			
TITLE 6400 SERIES AIR OPERATED TENSION BRAKE			
SIZE A	DWG NO 18503-340		REV
DATE	DRAWN	FILE MEMAST	QUOTE NO.

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.