


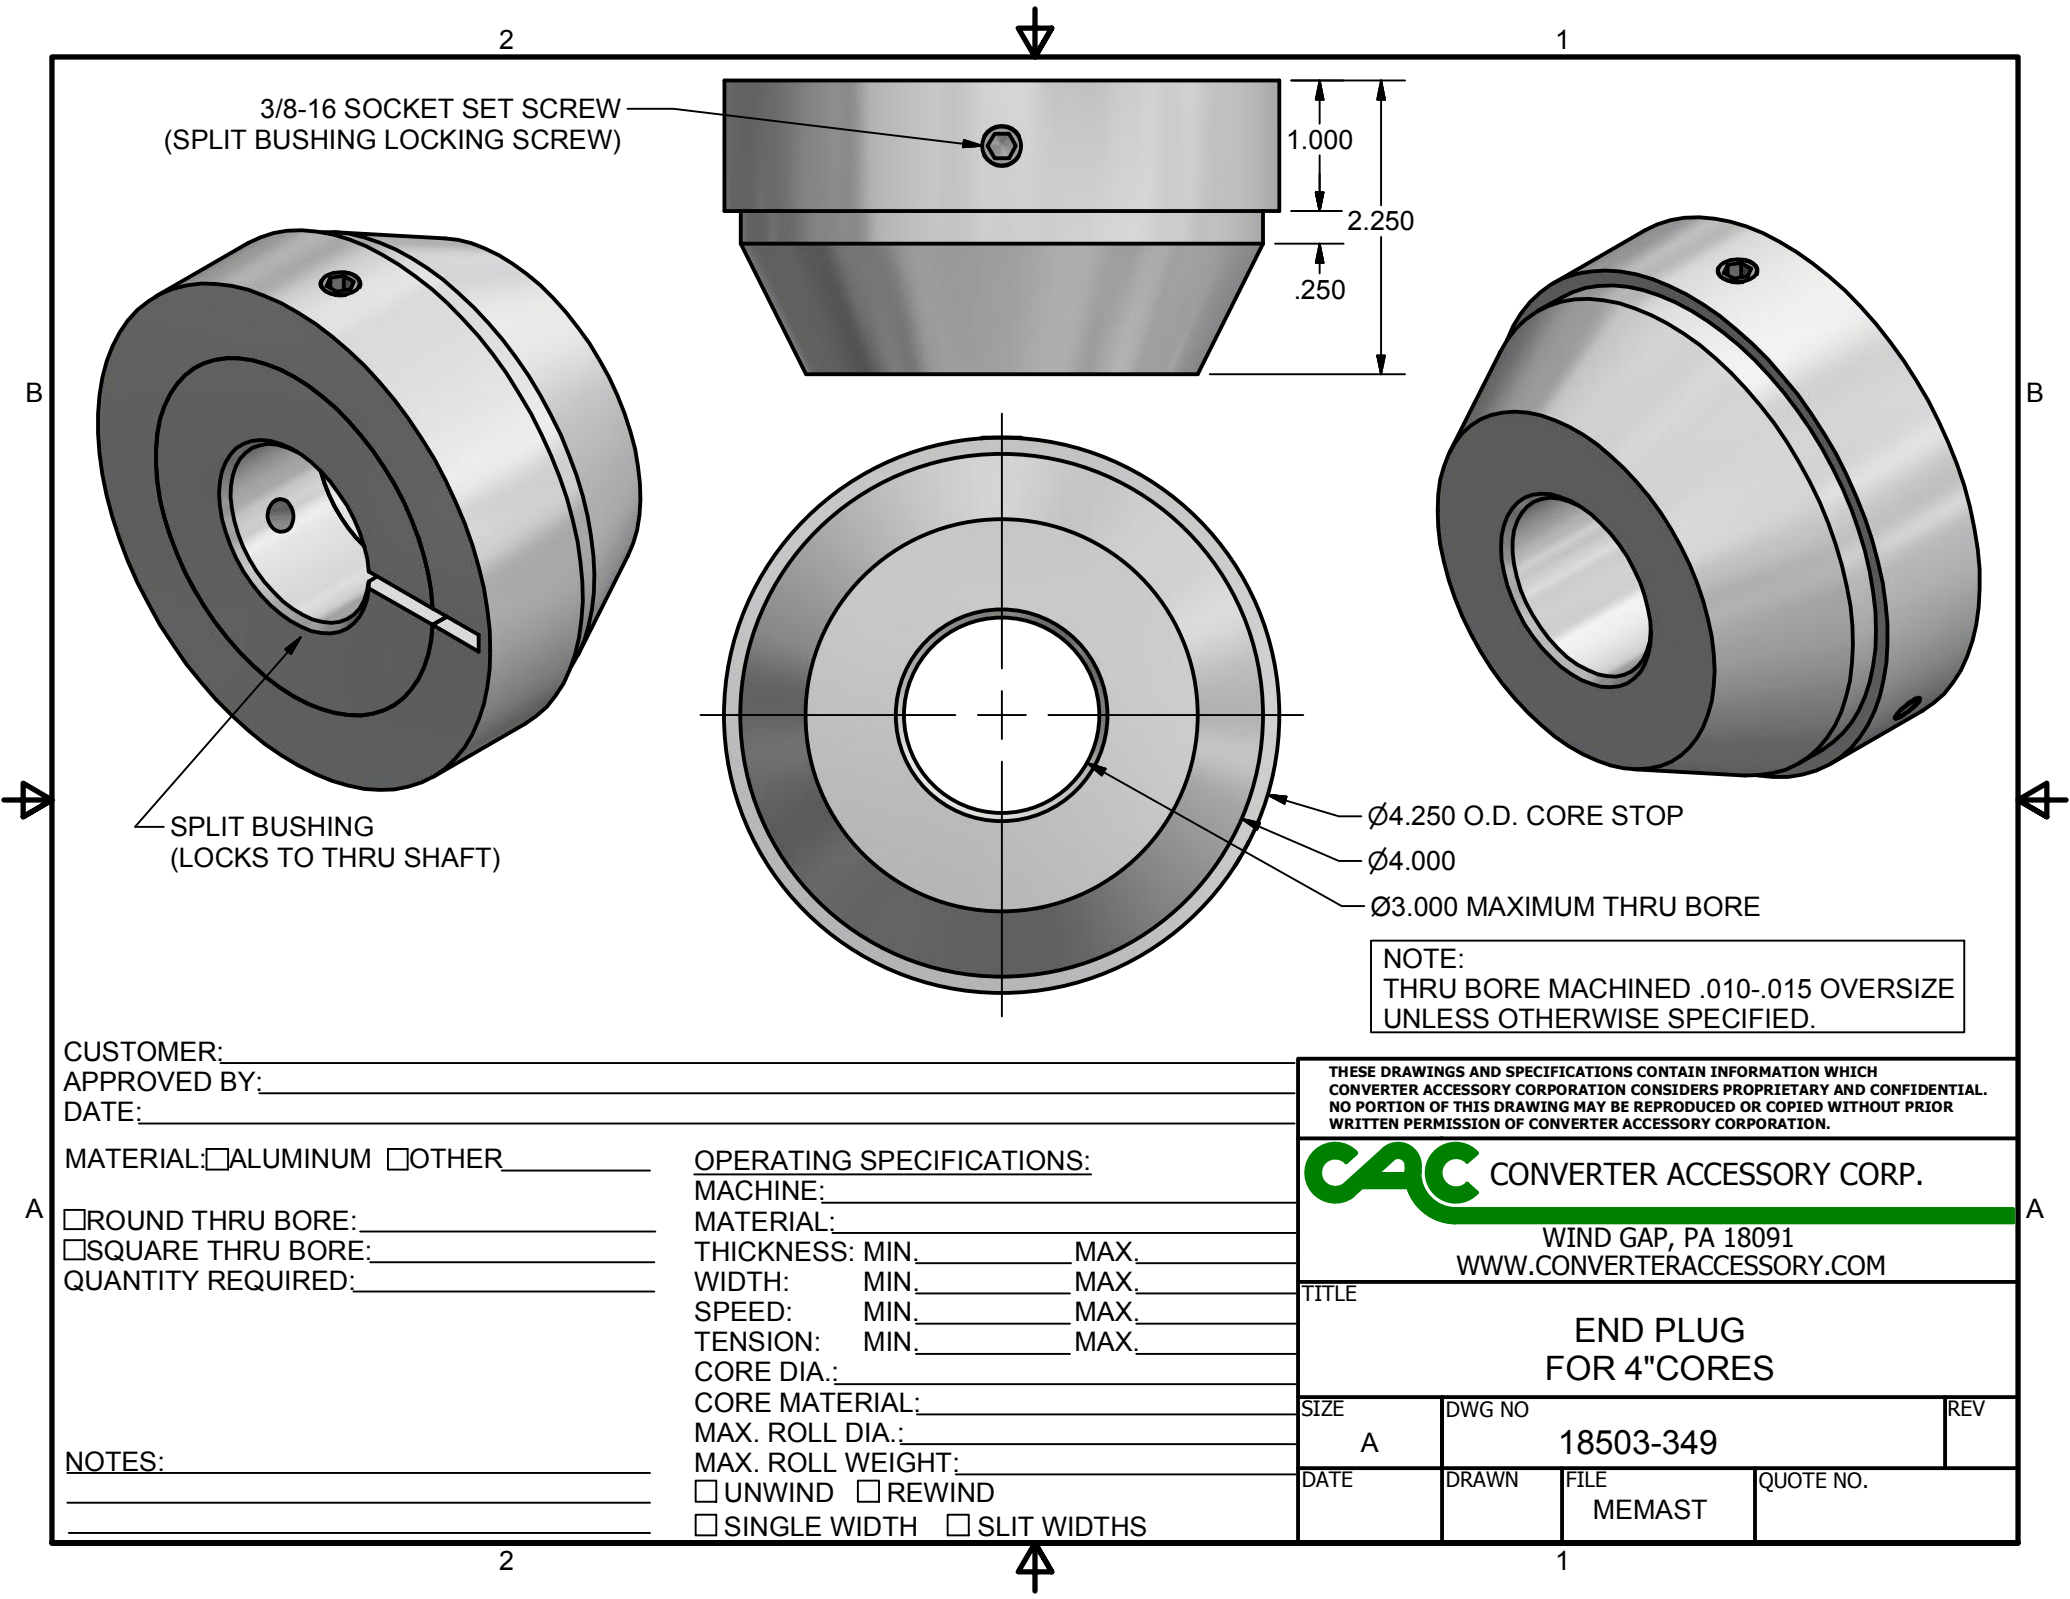

3/8-16 SOCKET SET SCREW
(SPLIT BUSHING LOCKING SCREW)

1.000
2.250
.250

SPLIT BUSHING
(LOCKS TO THRU SHAFT)

Ø4.250 O.D. CORE STOP
Ø4.000
Ø3.000 MAXIMUM THRU BORE

NOTE:
THRU BORE MACHINED .010-.015 OVERSIZE
UNLESS OTHERWISE SPECIFIED.

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

MATERIAL: ☐ ALUMINUM ☐ OTHER _____

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____

SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

CORE DIA.: _____

CORE MATERIAL: _____

MAX. ROLL DIA.: _____

MAX. ROLL WEIGHT: _____

☐ UNWIND ☐ REWIND

☐ SINGLE WIDTH ☐ SLIT WIDTHS

NOTES: _____

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE
END PLUG
FOR 4" CORES

SIZE A	DWG NO 18503-349	REV
DATE	DRAWN MEMAST	QUOTE NO.