
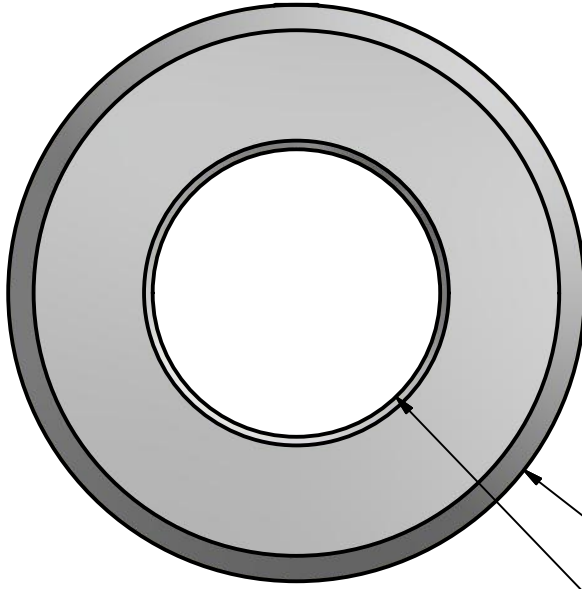



3/8-16 SOCKET SET SCREW
(SPLIT BUSHING LOCKING SCREW)
SPLIT BUSHING LOCKS TO THRU SHAFT

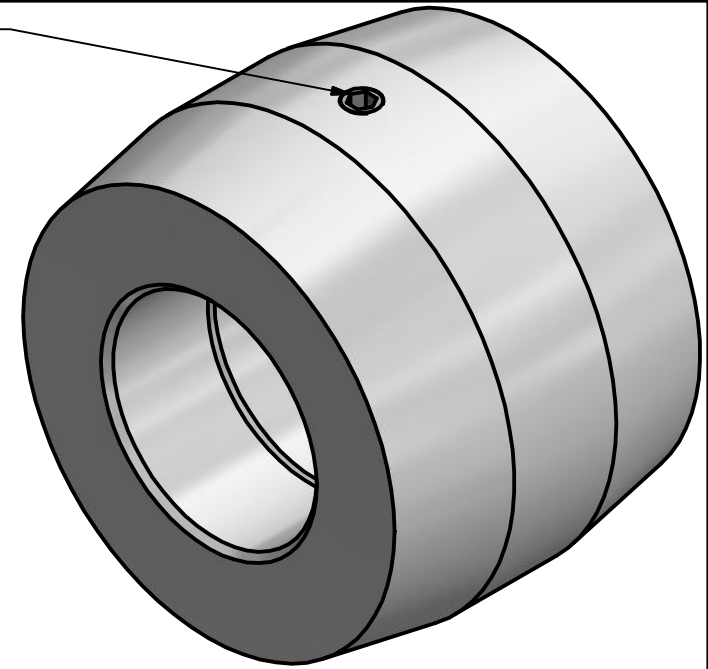

Ø4.000

Ø3.000 MAXIMUM THRU BORE

NOTE:
THRU BORE MACHINED .010-.015 OVERSIZE
UNLESS OTHERWISE SPECIFIED.

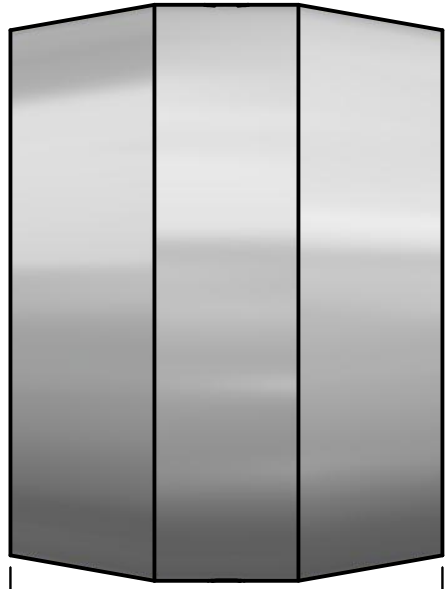

1.000 1.000 1.000
3.000

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

MATERIAL: ☐ ALUMINUM ☐ OTHER _____
☐ ROUND THRU BORE: _____
☐ SQUARE THRU BORE: _____
QUANTITY REQUIRED: _____

OPERATING SPECIFICATIONS:

MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE DIA.: _____
CORE MATERIAL: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____
☐ UNWIND ☐ REWIND
☐ SINGLE WIDTH ☐ SLIT WIDTHS

NOTES: _____

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE
CENTER PLUG
FOR 4" CORES

SIZE A	DWG NO 18503-350	REV
DATE	DRAWN MEMAST	QUOTE NO.