
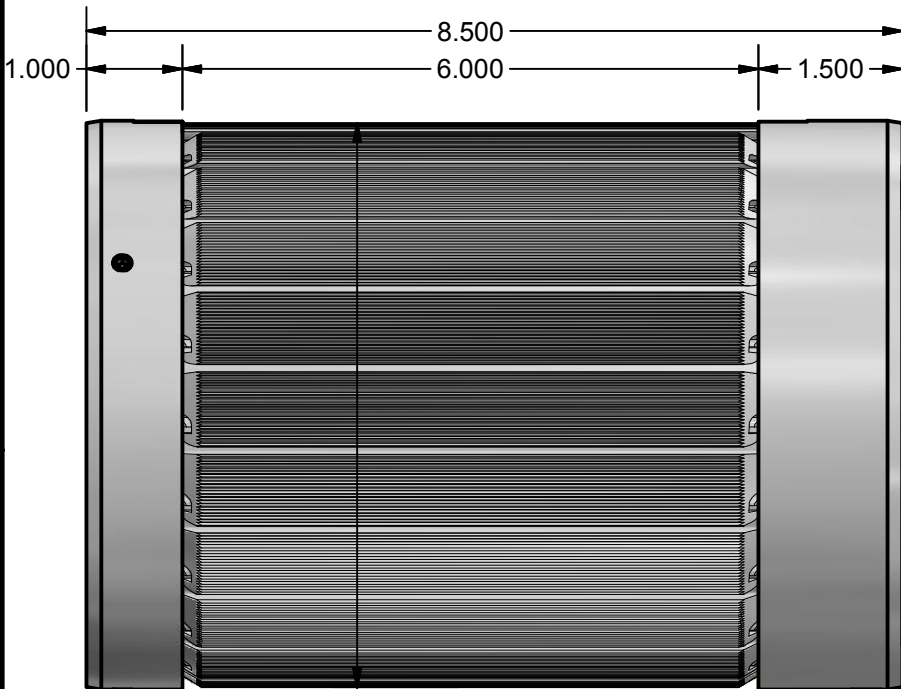


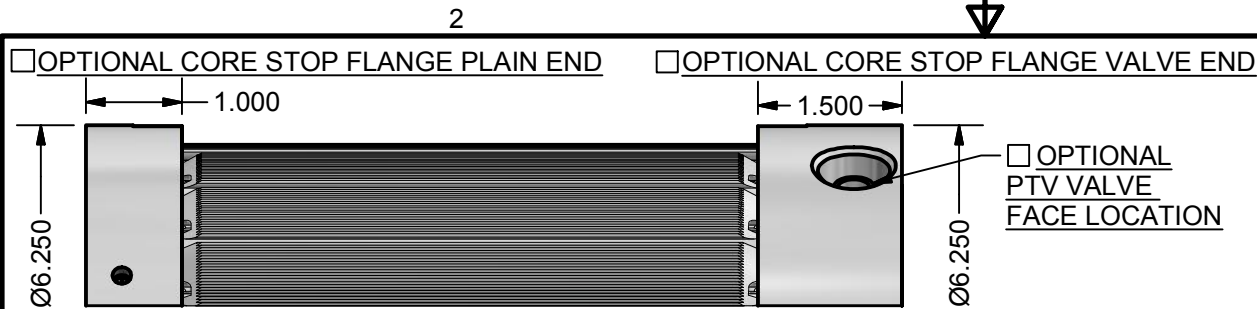

PLAIN END

Ø5.937 DEFLATED DIAMETER
Ø6.187 INFLATED DIAMETER

VALVE END

CUSTOMER: _____
APPROVED BY: _____
DATE: _____


OPERATING SPECIFICATIONS:

MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE DIA.: _____
CORE MATERIAL: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____
☐ UNWIND ☐ REWIND
☐ SINGLE WIDTH ☐ SLIT WIDTHS

NOTES: _____


APPROX. WEIGHT 12 LBS

☐ TYPICAL PTV VALVE LOCATION

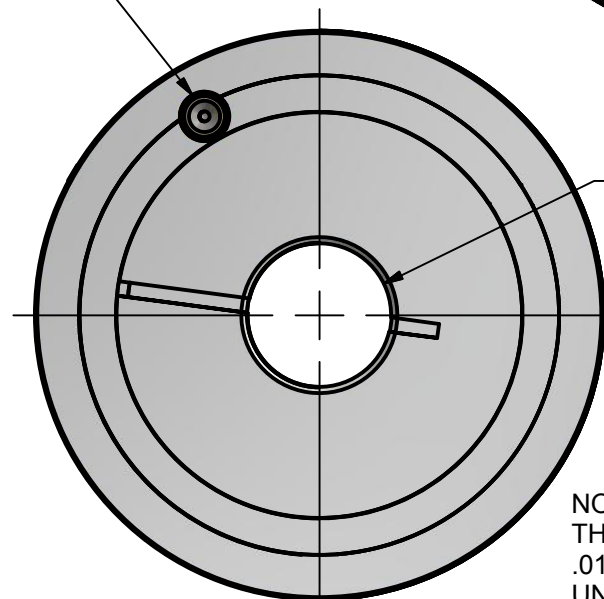

☐ ROUND BORE _____
(Ø4.00" MAXIMUM)
☐ SQUARE BORE _____
(2.50" SQUARE MAXIMUM)

NOTE:
THRU BORE MACHINED
.010-.015 OVERSIZE
UNLESS OTHERWISE SPECIFIED.

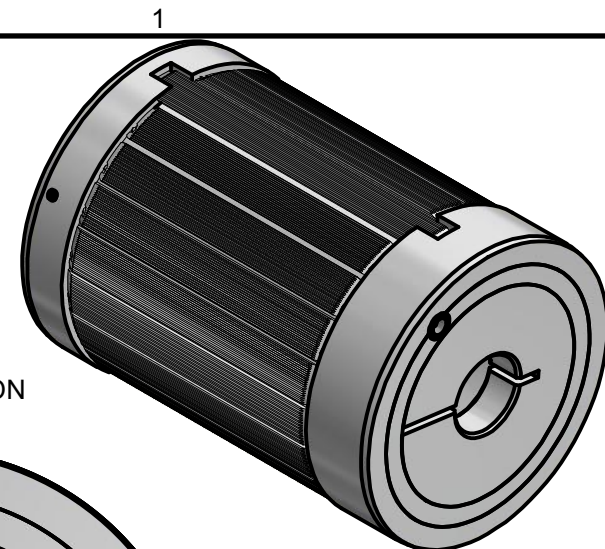

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE

COR-LOK-B2-PTV AIR CHUCK
FOR 6" CORES

SIZE

A

DWG NO

18503-355

REV

DATE

DRAWN

FILE

MEMAST

QUOTE NO.