




☐ OPTIONAL
CORE STOP FLANGE PLAIN END

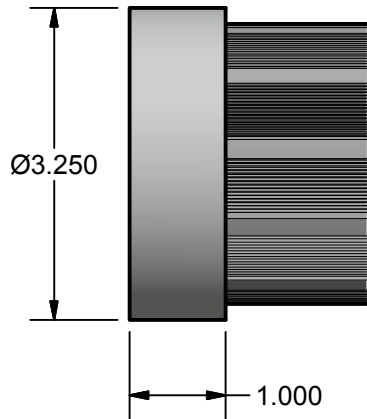

☐ OPTIONAL
CORE STOP FLANGE VALVE END

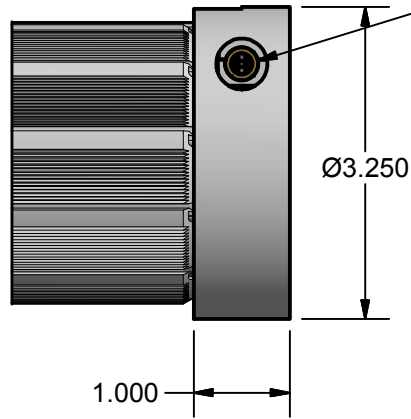

☐ OPTIONAL
SCHRADER VALVE
FACE LOCATION

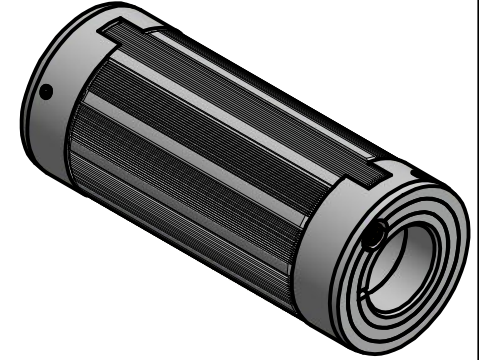


☐ TYPICAL
SCHRADER VALVE LOCATION

☐ ROUND BORE _____
(Ø1.750 MAXIMUM)
☐ SQUARE BORE _____
(1.250 SQUARE MAXIMUM)


1.000 5.000 1.000

PLAIN END

VALVE END

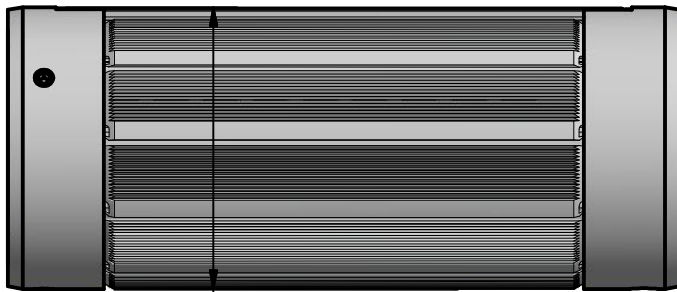

Ø2.937 DEFLATED DIAMETER
Ø3.125 INFLATED DIAMETER



NOTE:
THRU BORE MACHINED
.010-.015 OVERSIZE
UNLESS OTHERWISE SPECIFIED.

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE DIA.: _____
CORE MATERIAL: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____
☐ UNWIND ☐ REWIND
☐ SINGLE WIDTH ☐ SLIT WIDTHS

NOTES: _____

APPROX. WEIGHT 3 LBS

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE

COR-LOK AIR CHUCK
WITH SCHRADER VALVE FOR 3" CORES

SIZE

A

DWG NO

18503-356

REV

DATE

DRAWN

FILE

MEMAST

QUOTE NO.