


☐ OPTIONAL CORE STOP FLANGE PLAIN END

☐ OPTIONAL CORE STOP FLANGE VALVE END

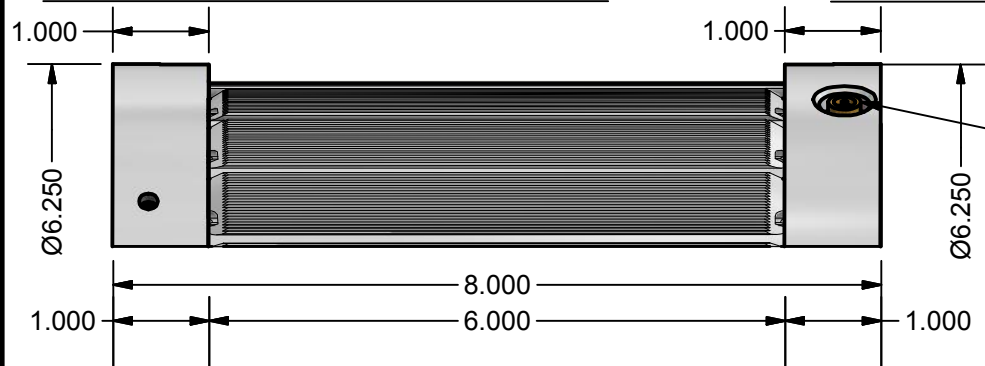

☐ OPTIONAL
SCHRADER VALVE
FACE LOCATION

☐ TYPICAL
SCHRADER VALVE LOCATION

☐ ROUND BORE
($\varnothing 4.00$ " MAXIMUM)

☐ SQUARE BORE
(2.50" SQUARE MAXIMUM)

NOTE:
THRU BORE MACHINED
.010-.015 OVERSIZE
UNLESS OTHERWISE SPECIFIED.

PLAIN END

$\varnothing 5.937$ DEFLATED DIAMETER
 $\varnothing 6.187$ INFLATED DIAMETER

VALVE END

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE DIA.: _____
CORE MATERIAL: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____
☐ UNWIND ☐ REWIND
☐ SINGLE WIDTH ☐ SLIT WIDTHS

NOTES: _____

APPROX. WEIGHT 12 LBS

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE

COR-LOK-AIR CHUCK
WITH SCHRADER VALVE FOR 6" CORES

SIZE

A

DWG NO

18503-357

REV

DATE

DRAWN

FILE

MEMAST

QUOTE NO.