


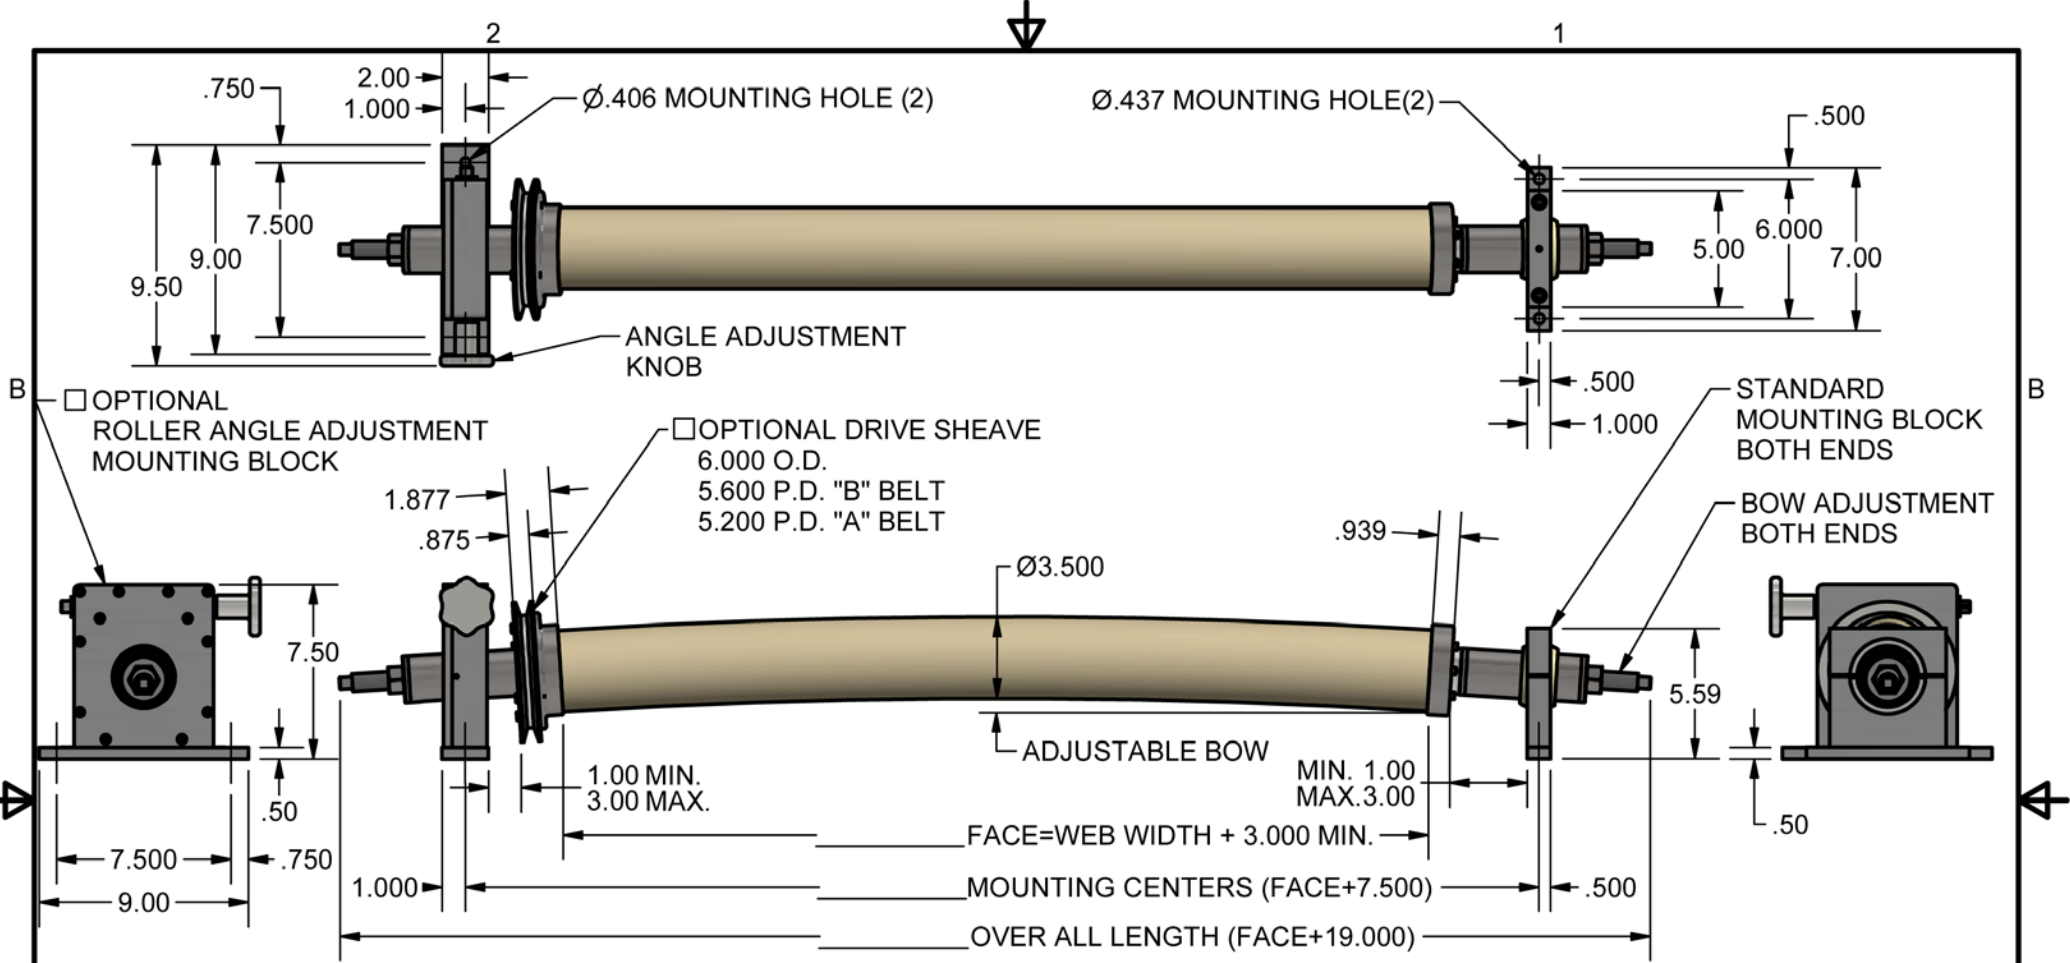

NOTES:

CUSTOMER: _____
APPROVED BY: _____ DATE: _____
RUBBER SLEEVE: _____
☐ STD. NITRILE, 70 DURO HARDNESS
☐ SPECIAL RUBBER: _____
DUROMETER HARDNESS: _____
DESIGN PARAMETERS:
ROLL FACE LENGTH: _____
14.00 INCH MINIMUM - 70.00 INCH MAXIMUM
MAXIMUM ROLL SPEED: 1500 FPM
MAXIMUM TENSION: 12 PLI
MINIMUM TURNING FORCE: .25 PLI
WT. 16.85 LBS + .83LB/IN. OF FACE
MOUNTING BLOCK: 4.5 LBS. EACH
DEAD SHAFT CONSTRUCTION _____
OPERATING SPECIFICATIONS:
MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
WEB WANDER: _____ MAX. ± _____
WRAP ANGLE: _____
TEMPERATURE AT SLEEVE: _____
IS OZONE PRESENT? ☐ YES ☐ NO
CHEMICAL CONTACT WITH SLEEVE? ☐ YES ☐ NO
IF YES, SPECIFY: _____

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.

CAC CONVERTER ACCESSORY CORP.
WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE
**3.50 INCH DIAMETER
ADJUSTABLE BOWED ROLL**

SIZE A	DWG NO 18503-386B	REV B
DATE	DRAWN FILE MEMAST	QUOTE NO.