


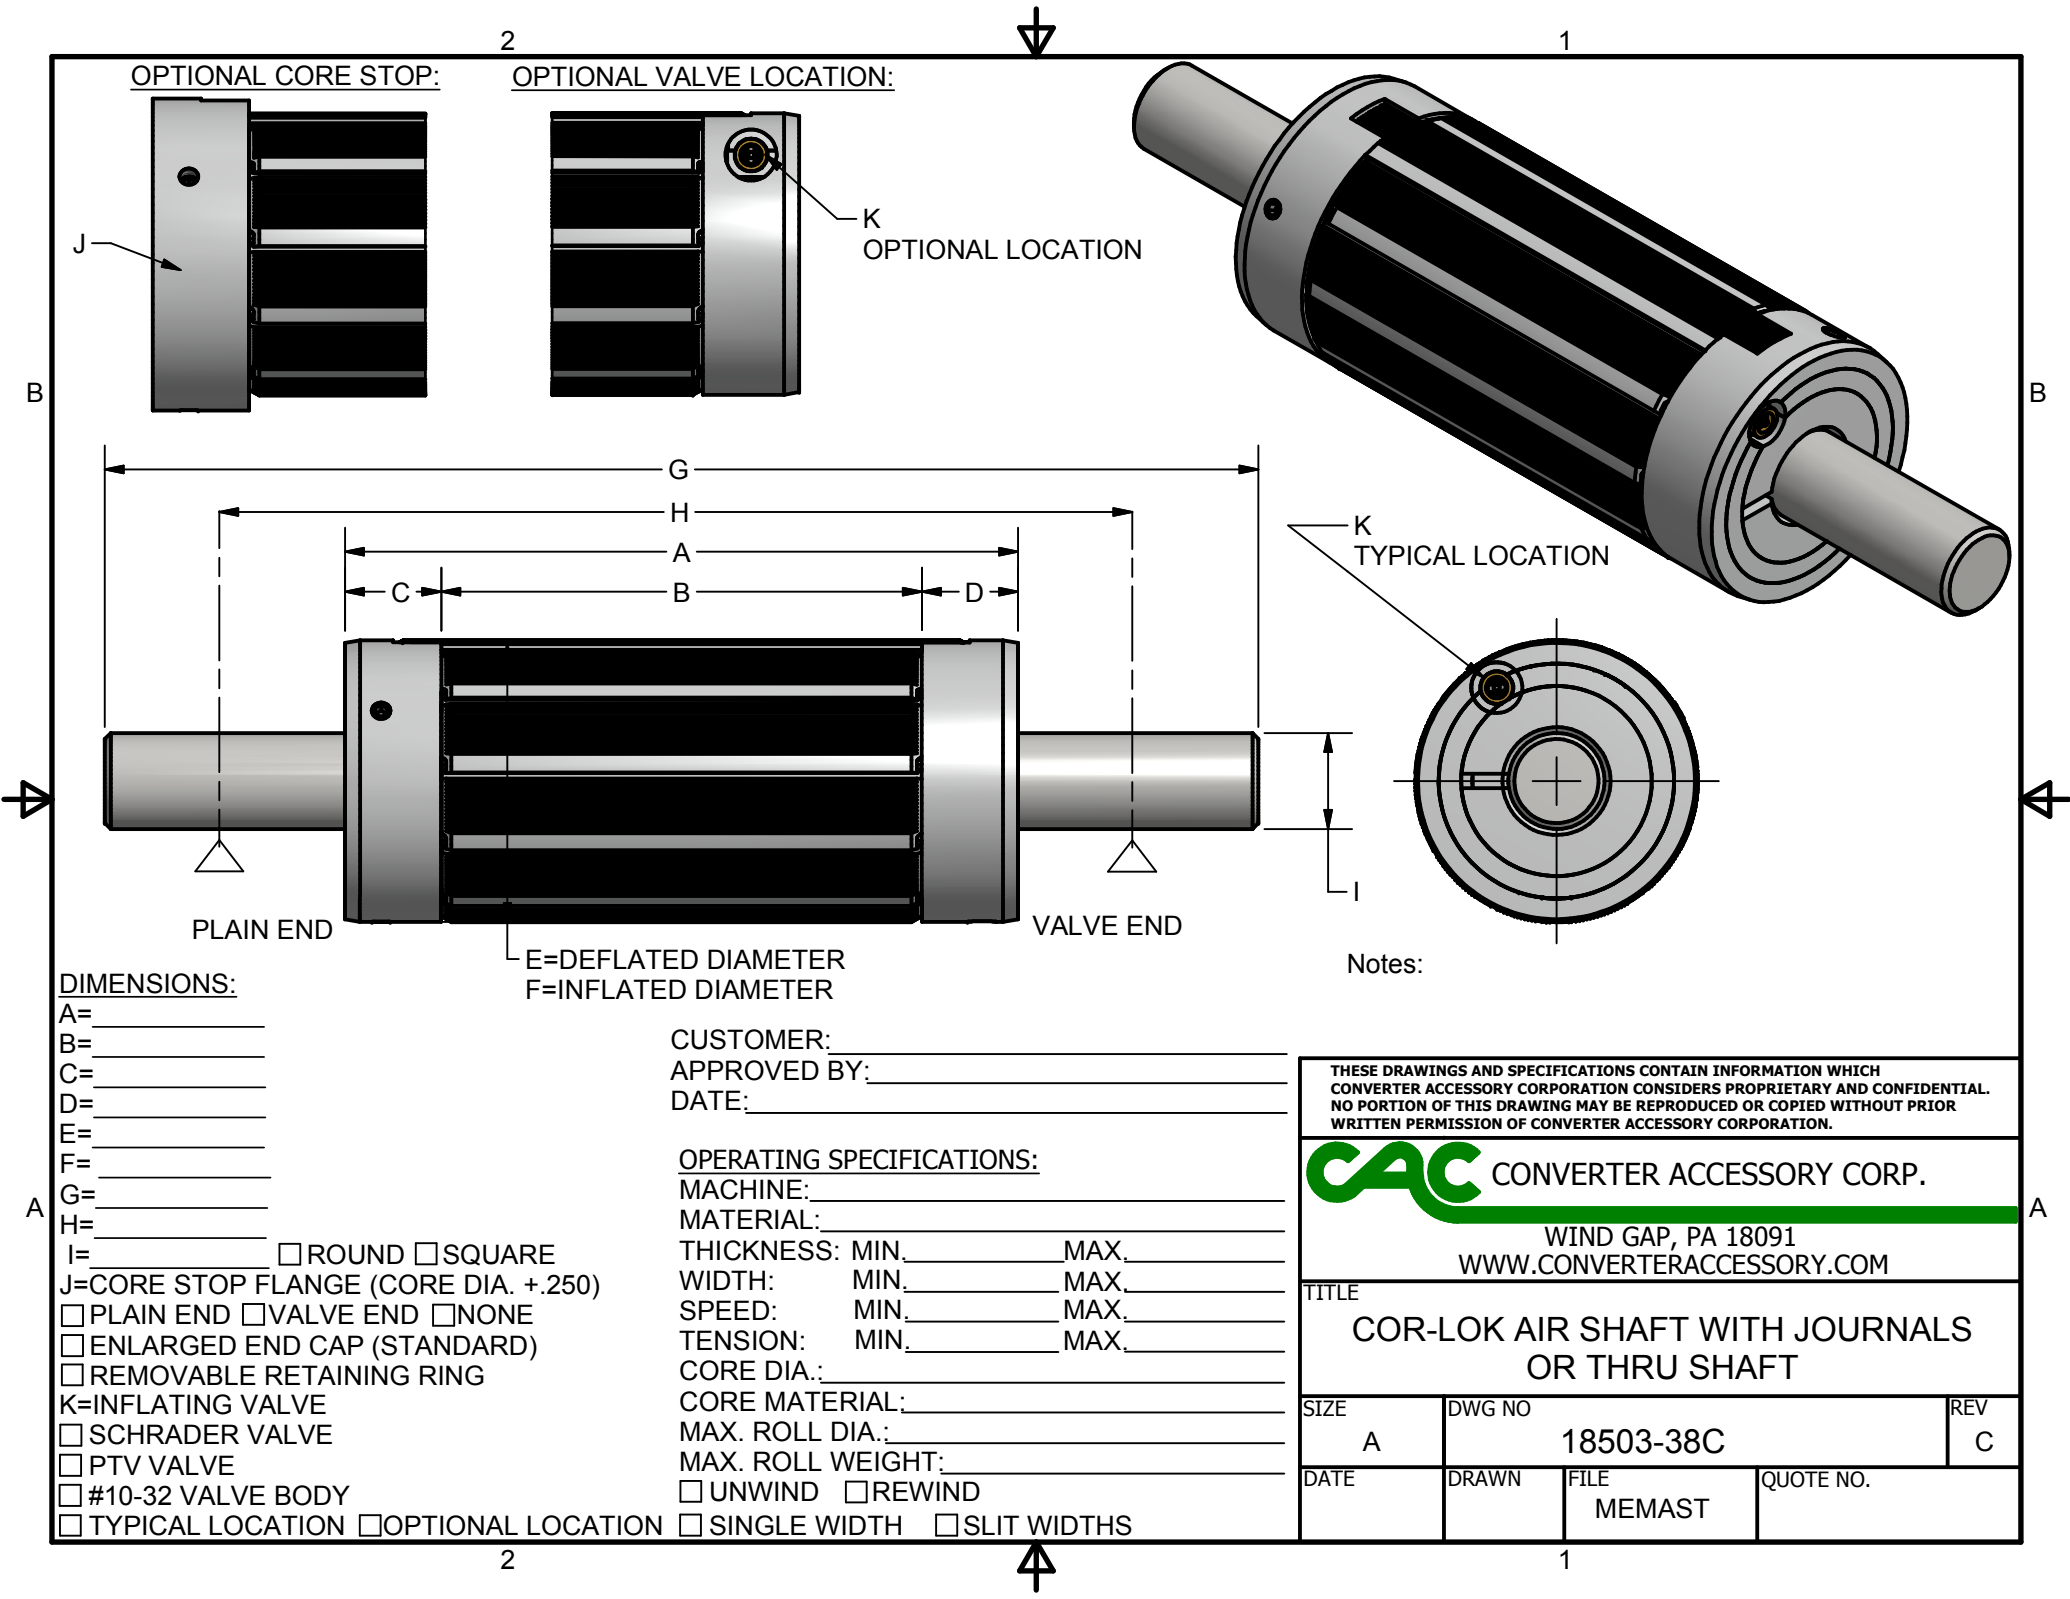

DIMENSIONS:

- A= _____
B= _____
C= _____
D= _____
E= _____
F= _____
G= _____
H= _____
I= _____ ☐ ROUND ☐ SQUARE
J=CORE STOP FLANGE (CORE DIA. +.250)
☐ PLAIN END ☐ VALVE END ☐ NONE
☐ ENLARGED END CAP (STANDARD)
☐ REMOVABLE RETAINING RING
K=INFLATING VALVE
☐ SCHRADER VALVE
☐ PTV VALVE
☐ #10-32 VALVE BODY
☐ TYPICAL LOCATION ☐ OPTIONAL LOCATION

CUSTOMER: _____
APPROVED BY: _____
DATE: _____

OPERATING SPECIFICATIONS:
MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE DIA.: _____
CORE MATERIAL: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____
☐ UNWIND ☐ REWIND
☐ SINGLE WIDTH ☐ SLIT WIDTHS

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.			
CAC CONVERTER ACCESSORY CORP. WIND GAP, PA 18091 WWW.CONVERTERACCESSORY.COM			
TITLE COR-LOK AIR SHAFT WITH JOURNALS OR THRU SHAFT			
SIZE A	DWG NO 18503-38C		REV C
DATE	DRAWN	FILE MEMAST	QUOTE NO.