

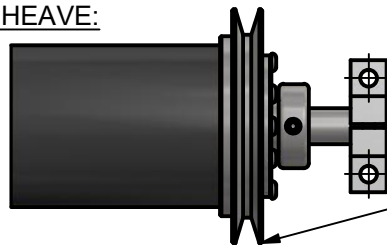
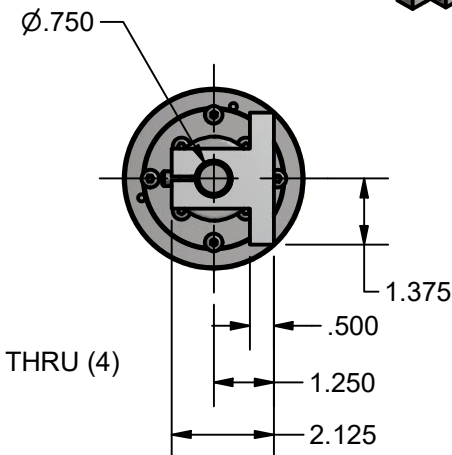


2
OPTIONAL DRIVE SHEAVE:

NOTES:

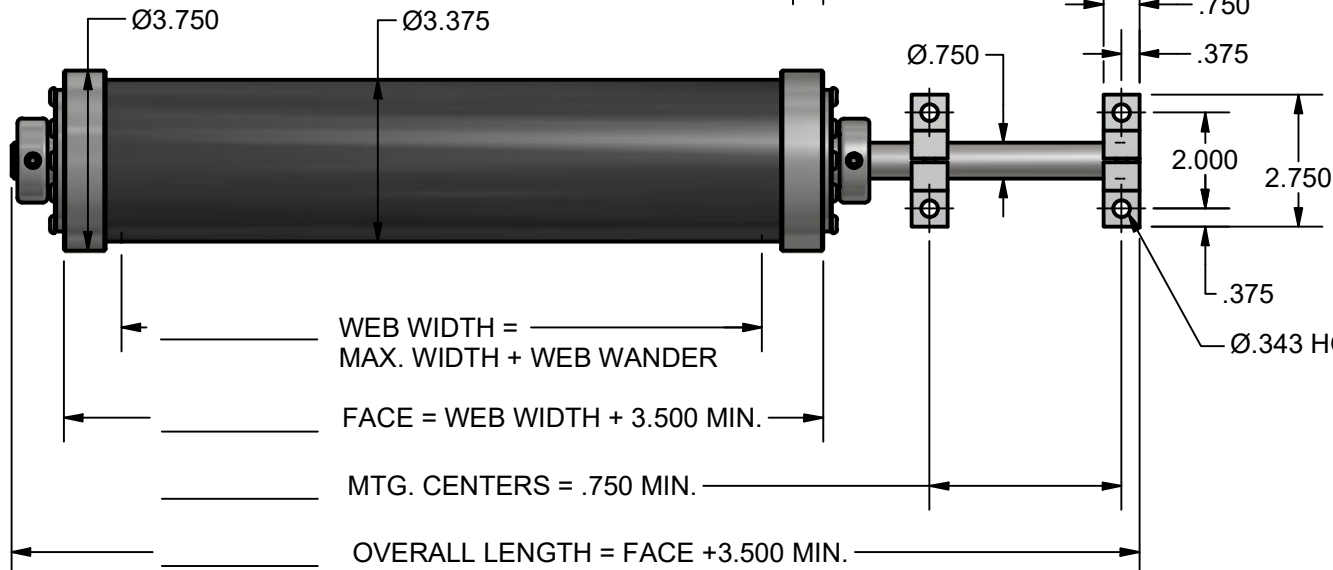

DRIVE SHEAVE 4.875 O.D.
"B"-BELT 4.885 P.D.
"A"-BELT 4.575 P.D.

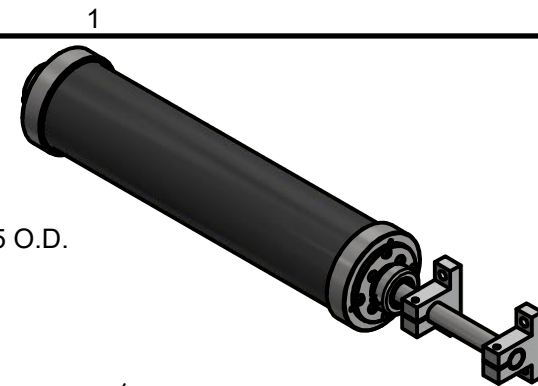

CUSTOMER: _____

APPROVED BY: _____ DATE: _____

OPTIONS:

MOUNTING BRACKETS:

☐ STD. (PILLOW BLOCK) ☐ FLANGE ☐ NONE

☐ DR.&TAP ENDS _____ THREAD, _____ DEEP

☐ DRIVE SHEAVE

RUBBER SLEEVE:

☐ STD. NEOPRENE, 50 DURO HARDNESS

☐ SPECIAL RUBBER: _____

DUROMETER HARDNESS: _____

DESIGN PARAMETERS:

MAX. ROLL SPEED: 500 FPM

MAX. TENSION: 4 PLI

MIN. TURNING FORCE: .17 PLI

WT. 7# + .75#/IN. OF FACE

DEAD SHAFT CONSTRUCTION

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____

SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

WEB WANDER: _____ MAX. ± _____

WRAP ANGLE: _____

TEMPERATURE AT SLEEVE: _____

IS OZONE PRESENT? ☐ YES ☐ NO

CHEMICAL CONTACT WITH SLEEVE? ☐ YES ☐ NO

IF YES, SPECIFY: _____

NOTE: STANDARD COMPONENTS WILL BE USED
UNLESS OTHERWISE SPECIFIED.

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR
WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091

WWW.CONVERTERACCESSORY.COM

TITLE

3.37 WRINKLESTOP ANTI-WRINKLE ROLL
CANTILEVERED DESIGN

SIZE	DWG NO	REV
A	18503-44F	F
DATE	DRAWN	FILE
	MEMAST	QUOTE NO.