


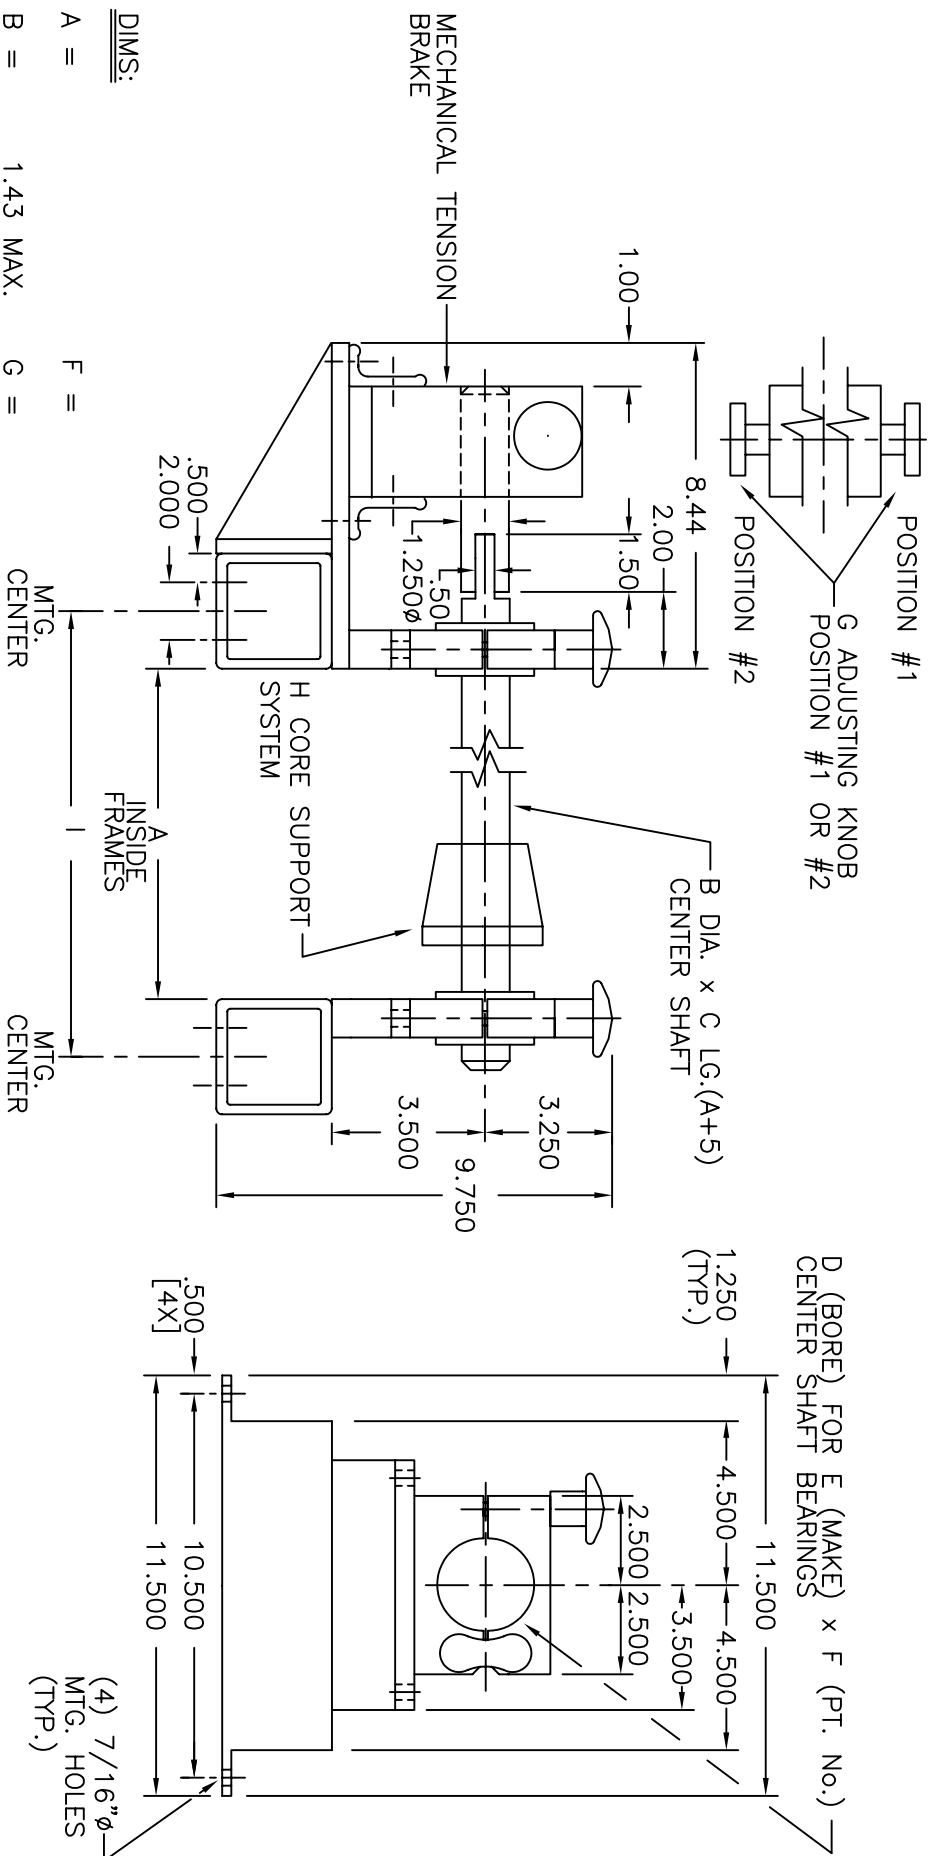

DIMS:

A =

F =

B =

1.43 MAX.

G =

C =

H =

D =

2.84 MAX.

I =

E =

OPTIONS:

CENTER SHAFT YES ☐ NO ☐
 CENTER SHAFT BEARINGS(2) YES ☐ NO ☐
 CORE SUPPORT SYSTEM YES ☐ NO ☐

NOTES:

- 1) MOUNT AS SHOWN, HORIZONTAL WITH TOP CAP UP.
- 2) MAX. LOAD CAPACITY WITH NICE #7620 BRG. ©
 50 R.P.M. = 1000LBS.

OPERATING SPECIFICATIONS:

MACHINE: _____
MATERIAL: _____
THICKNESS: MIN. _____ MAX. _____
WIDTH: MIN. _____ MAX. _____
SPEED: MIN. _____ MAX. _____
TENSION: MIN. _____ MAX. _____
CORE SIZE: _____
MAX. ROLL DIA.: _____
MAX. ROLL WEIGHT: _____

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION

CUSTOMER: _____

APPROVED BY: _____

DATE: _____



CONVERTER ACCESSORY CORP.
 WIND GAP, PA

SPECIFICATION SHEET

TITLE: STD. DUTY SHAFT HOLDER ASS'Y.
 W/MECHANICAL TENSION BRAKE

DRAWN BY: DWH **SCALE:** NONE **QUOTE No.:** _____

DWG. NO.: 18503-56

DISK FILE: MEMAST