
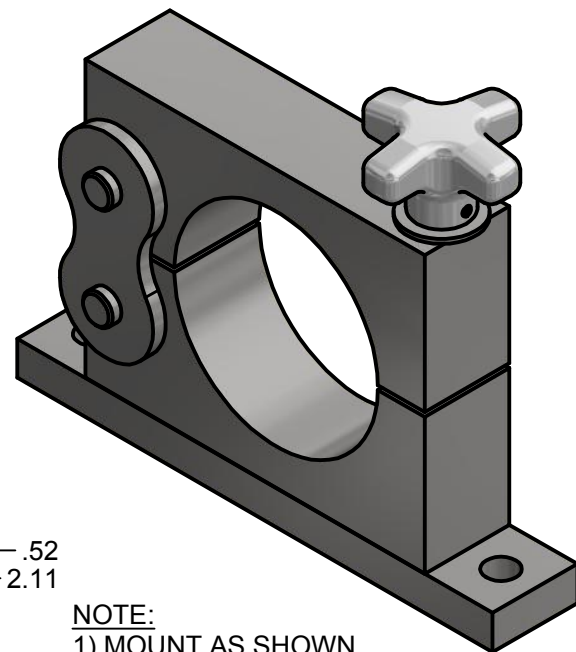
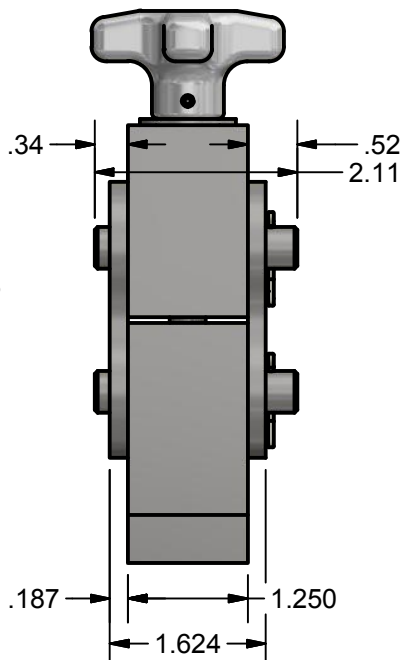
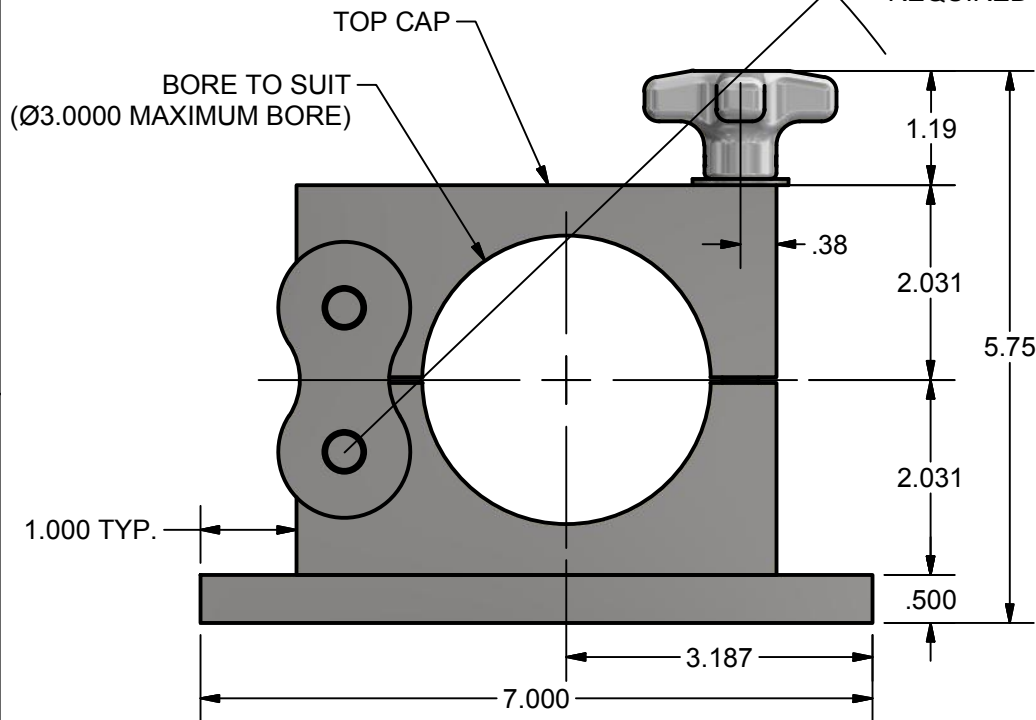


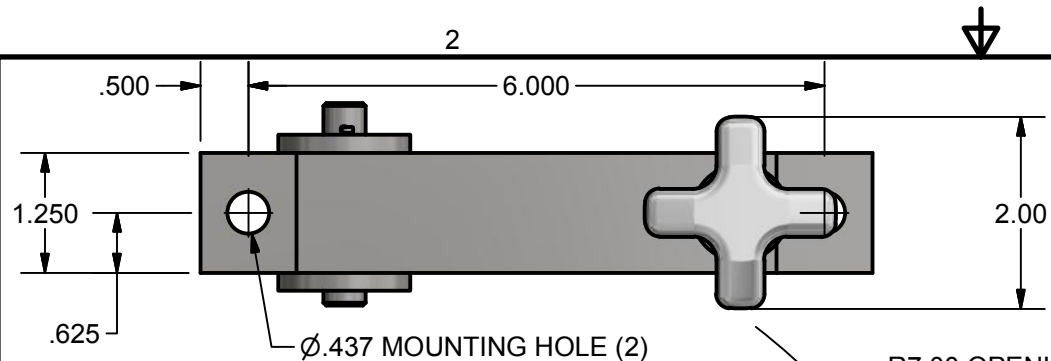

NOTE:

- 1) MOUNT AS SHOWN, HORIZONTAL WITH TOP CAP UP.
- 2) MAXIMUM LOAD CAPACITY 1250 LBS EACH / 2500 LBS PER PAIR
- 3) BORE SIZE REQUIRED: _____
- 4) _____

CUSTOMER: _____

APPROVED BY: _____

DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____

SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

CORE SIZE: _____

MAXIMUM ROLL DIAMETER: _____

MAXIMUM ROLL WEIGHT: _____

PART NUMBER: 47266-01A

THESE DRAWINGS AND SPECIFICATIONS
CONTAIN INFORMATION WHICH
CONVERTER ACCESSORY CORPORATION
CONSIDERS PROPRIETARY AND
CONFIDENTIAL.
NO PORTION OF THIS DRAWING MAY
BE REPRODUCED OR COPIED WITHOUT
PRIOR WRITTEN PERMISSION OF
CONVERTER ACCESSORY CORPORATION.



CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091

WWW.CONVERTERACCESSORY.COM

TITLE

SIMPLOK MEDIUM DUTY SHAFT HOLDER

SIZE

DWG NO

REV

A

18503-59B

B

DATE

DRAWN

FILE

MEMAST

QUOTE NO.