

TORQUE OUTPUT				
BRAKE MODEL	6210	6230	6245	
COEFFICIENT OF FRICTION	.10	.30	.45	
TORQUE LB. / IN.	MIN.	2.2	6.6	10
	MAX.	330	1000	1500

HORSE POWER					
600	2.87	1250	4.63	1900	6.00
550	2.72	1200	4.51	1850	5.90
500	2.56	1150	4.39	1800	5.81
450	2.40	1100	4.26	1750	5.71
400	2.23	1050	4.14	1700	5.61
350	2.06	1000	4.01	1650	5.51
300	1.89	950	3.88	1600	5.41
250	1.72	900	3.74	1550	5.31
200	1.54	850	3.60	1500	5.20
150	1.36	800	3.46	1450	5.09
100	1.18	750	3.32	1400	4.98
50	.99	700	3.17	1350	4.87
0	.80	650	3.02	1300	4.75
ECS	HP	ECS	HP	ECS	HP

www.converteraccessory.com/ss/tqrpmhp.htm

NOTE: ECS=EFFECTIVE COOLING SPEED

CUSTOMER: _____

APPROVED BY: _____

DATE: _____

OPERATING SPECIFICATIONS:

MACHINE: _____

MATERIAL: _____

THICKNESS: MIN. _____ MAX. _____

WIDTH: MIN. _____ MAX. _____


SPEED: MIN. _____ MAX. _____

TENSION: MIN. _____ MAX. _____

CORE DIA.: _____

MAX. ROLL DIA.: _____

MAX. ROLL WEIGHT: _____

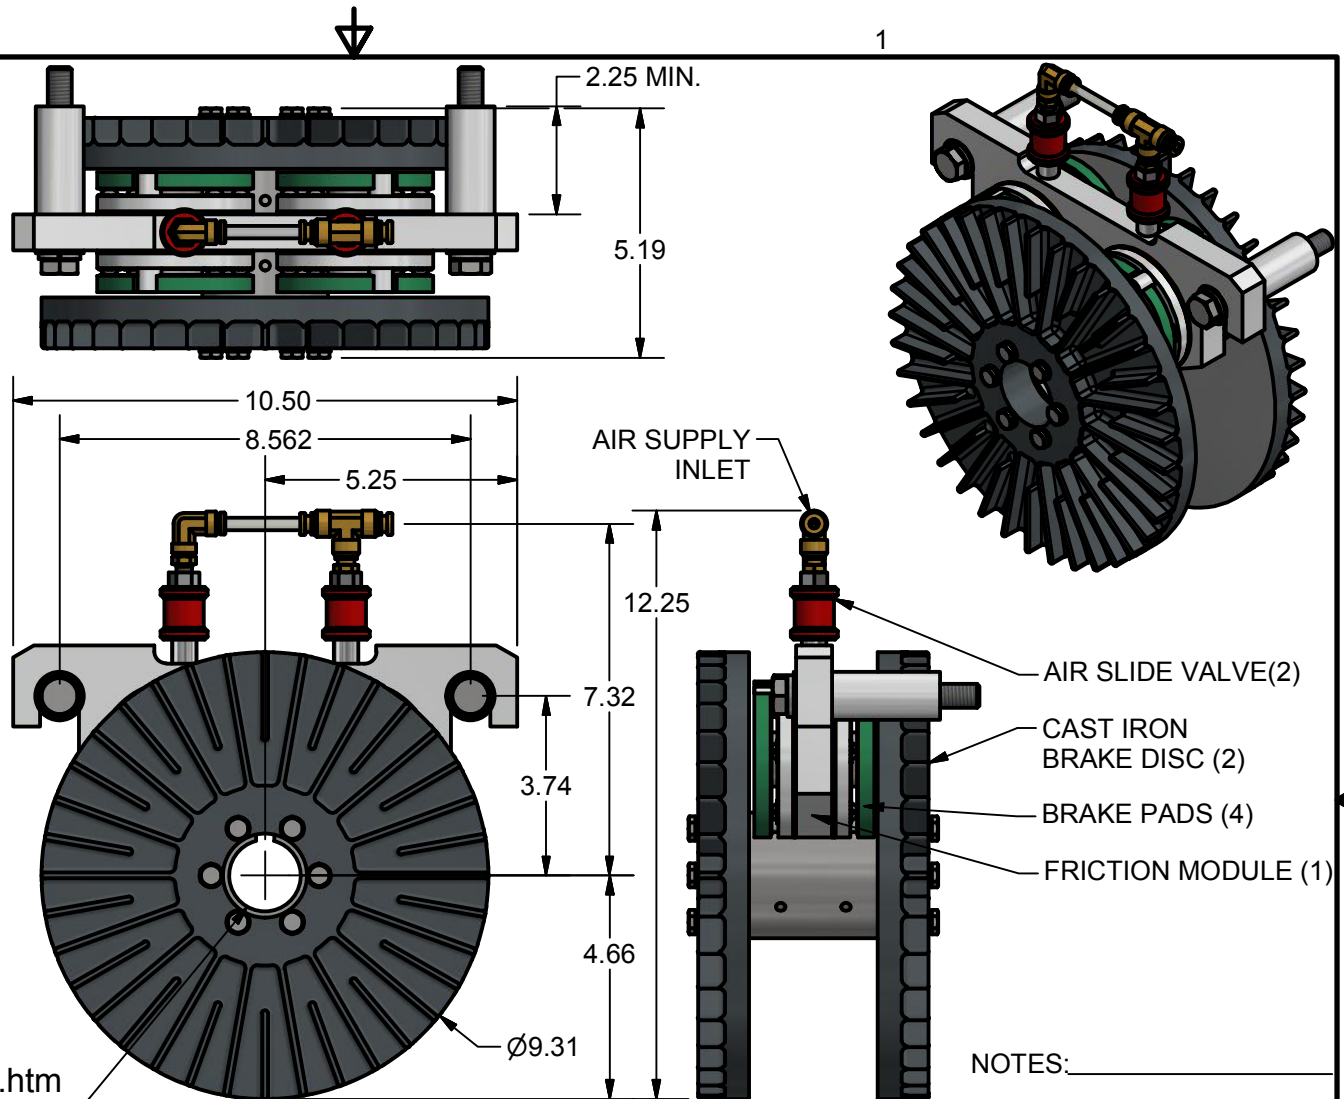

NOTES: _____

CAC CONVERTER ACCESSORY CORP.

WIND GAP, PA 18091
WWW.CONVERTERACCESSORY.COM

TITLE			
6200 SERIES AIR OPERATED TENSION BRAKE			
SIZE	DWG NO	REV	
A	18503-88A		
DATE	DRAWN	FILE	QUOTE NO.
		MEMAST	

THESE DRAWINGS AND SPECIFICATIONS CONTAIN INFORMATION WHICH CONVERTER ACCESSORY CORPORATION CONSIDERS PROPRIETARY AND CONFIDENTIAL. NO PORTION OF THIS DRAWING MAY BE REPRODUCED OR COPIED WITHOUT PRIOR WRITTEN PERMISSION OF CONVERTER ACCESSORY CORPORATION.