

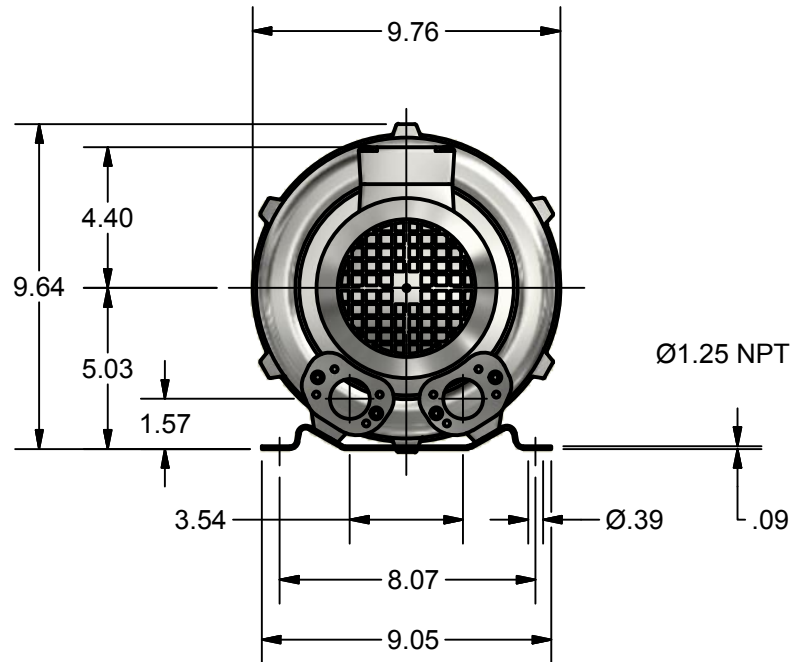


MODEL NO.	CURVE NO.	FLOW (CFM)	MAX. PRESSURE (INCH WATER)	MAX. VACUUM	SOUND LEVEL (db)	INLET / OUTLET NPT
300AB	A4	64	60	52	61	1.25"

PHASE	VOLTAGE	CURRENT	KW	HP	WEIGHT (LBS)
1	110-120/220-240	7.8/3.9	0.4	0.50	25

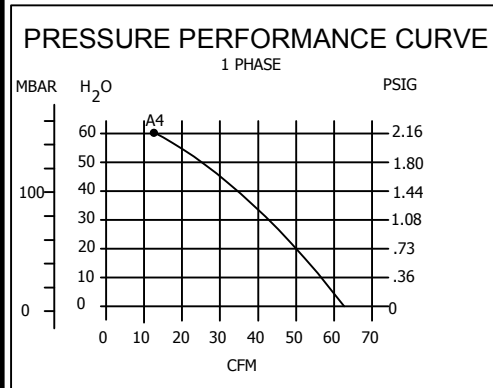

Ø1.25 NPT (X2)

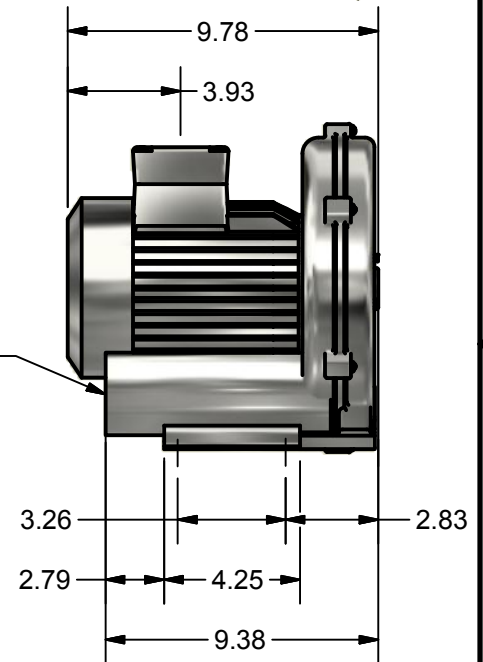


CUSTOMER: _____
APPROVED BY: _____ DATE: _____

ACCESSORIES: _____ PART NO. _____
 FILTER CANISTER: 20222-232
 FILTER ELEMENT: 20222-233
 SILENCER: 20222-227
 ENCLOSED MOTOR STARTER (120V): 20222-242
 ENCLOSED MOTOR STARTER (240V): 20222-243

NOTES: _____

SHOWN, PART#20222-218

THESE DRAWINGS AND SPECIFICATIONS
 CONTAIN INFORMATION WHICH
 CONVERTER ACCESSORY CORPORATION
 CONSIDERS PROPRIETARY AND
 CONFIDENTIAL.
 NO PORTION OF THIS DRAWING MAY
 BE REPRODUCED OR COPIED WITHOUT
 PRIOR WRITTEN PERMISSION OF
 CONVERTER ACCESSORY CORPORATION.

 CONVERTER ACCESSORY CORP. WIND GAP, PA 18091 WWW.CONVERTERACCESSORY.COM			
MODEL#300AB REGENERATIVE BLOWER			
SIZE	DWG NO		REV
A	18503-298		
DATE	DRAWN	FILE	QUOTE NO.
		MEMAST	